

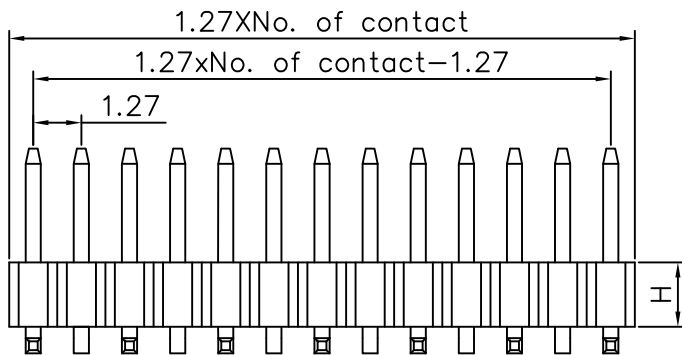
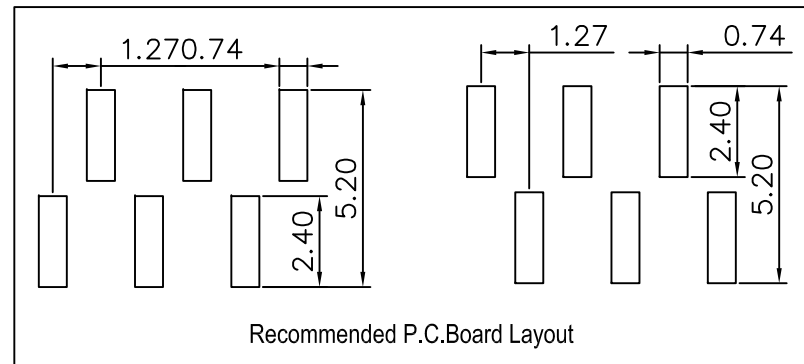


REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/01/05

打印日期:2023/1/5 17:13:44

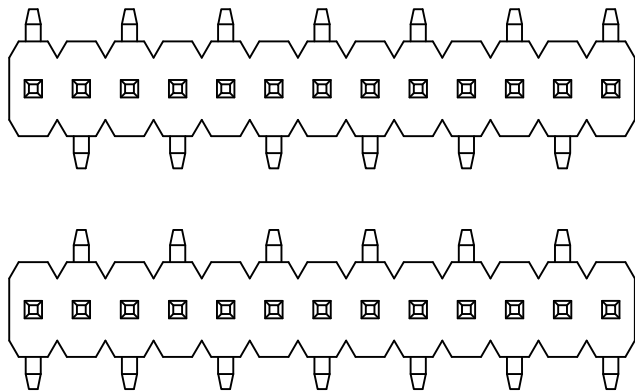

SPECIFICATIONS

- Current Rating: 1.0Amps
- Contact Resistance: 20Milliohms Max
- Insulator Resistance: 1000 Megohms Min.
- Dielectric Withstanding: 500VAC/minute
- Operating Temperature: -40°C~+105°C
- Max Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

MATERIALS:

- Contact Material: Brass
- Contact Plating: Gold or Tin over 50u"Ni
- Insulator Material: Glass Filled Polyester(UL94V-0)
- Standard:PA6T

		深圳市新世联电子有限公司 Http://www.cisconn.com TEL:+86(755)29912370 FAX:29912372			
Tolerance Unless Otherwise Specified		Title PH1.27 排针 单排单塑 SMT			
.X ~ ±0.30		Units mm	Scale 4:1	REV NO. V0	Material No. xxxx-xxxx-xxx-xx
.XX ~ ±0.25					
.XXX ~ ±0.20					
Angle ~ ± 3°	Drawing By 设计人	Date 2023/01/05	Reviewed By	Date	Approvai By Date