
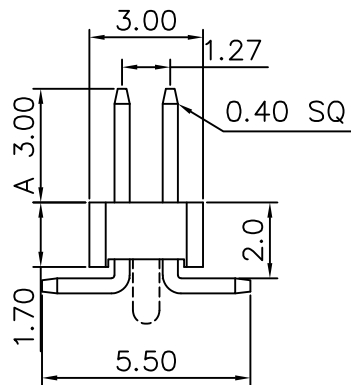
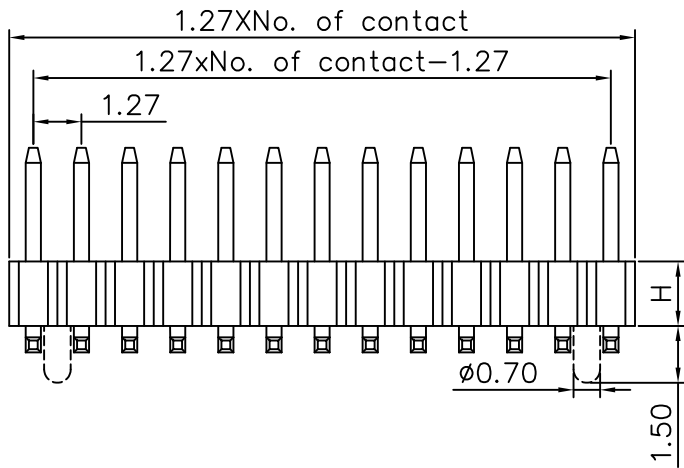


REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/01/05

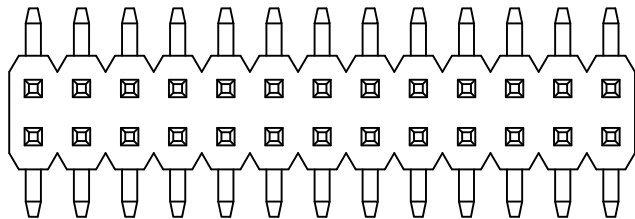


SPECIFICATIONS

Current Rating: 1.0Amps
 Contact Resistance: 20Milliohms Max
 Insulator Resistance: 1000 Megohms Min.
 Dielectric Withstanding: 500VAC/minute
 Operating Temperature: -40°C~+105°C
 Max Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

MATERIALS:

Contact Material: Brass
 Contact Plating: Gold or Tin over 50u"Ni
 Insulator Material: Glass Filled Polyester(UL94V-0)
 Standard:PA6T

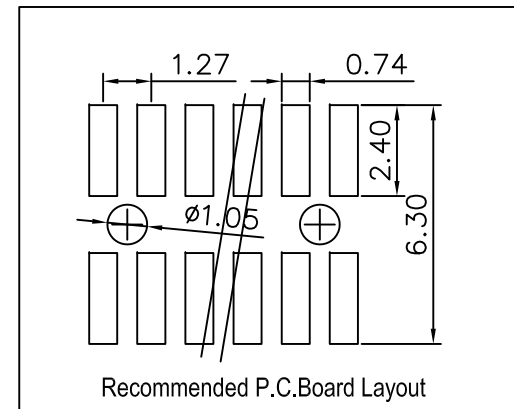

cisconn Http://www.cisconn.com		深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372			
Tolerance Unless Otherwise Specified	Title	PH1.27 排针 双排单塑 SMT			
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	4:1	V0	xxxx-xxxx-xxx-xx
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approvai By Date
Angle ~ ± 3°	设计人	2023/01/05			

打印日期:2023/1/5 17:54:01

B

A

D

C

B

A