

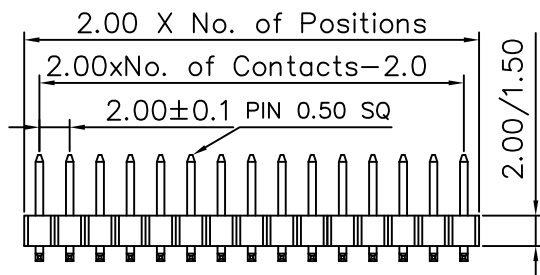




| REV NO. | REVISION NOTE | REVISER | DATE |
|---------|---------------|---------|------------|
| V0 | NEW DRAWING | | 2023/01/06 |

打印日期:2023/1/7 15:06:27



SPECIFICATIONS

Current Rating:2AMP
 Contact Resistance:20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstand Voltage:500V AC/minute
 Operation Temperature:-40℃ to +105℃
 Contact Material: Copper Alloy
 Contact Plating:Au or Sn over 50 μ "Ni
 Insulator Material:Polyester(UL94V-0)
 Standard:PA46

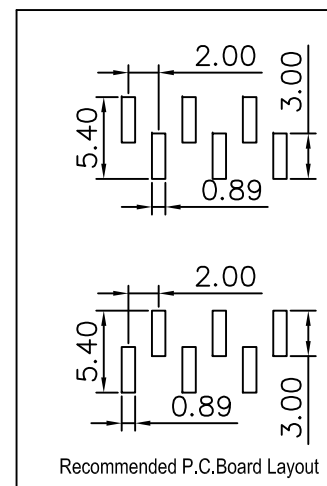

Recommended P.C.Board Layout

B

B

A

A

| | | | | | |
|---|------------|-----------------------------------|-------------|---------|------------------|
| | | 深圳市新世联电子有限公司 | | | |
| Http://www.cisconn.com | | TEL:+86(755)29912370 FAX:29912372 | | | |
| Tolerance Unless Otherwise Specified | Title | PH2.0排针 单排单塑 SMT | | | |
| .X ~ ±0.30 | | Units | Scale | REV NO. | Material No. |
| .XX ~ ±0.25 | | mm | 4:1 | V0 | xxxx-xxxx-xxx-xx |
| .XXX ~ ±0.20 | Drawing By | Date | Reviewed By | Date | Approvai By Date |
| Angle ~ ± 3° | 设计人 | 2023/01/06 | | | |