
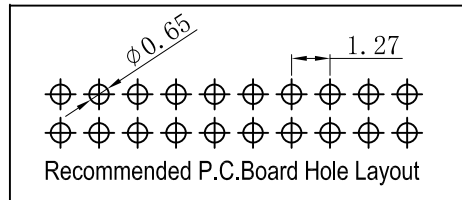
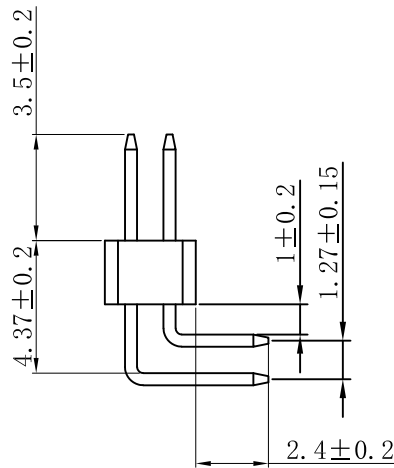
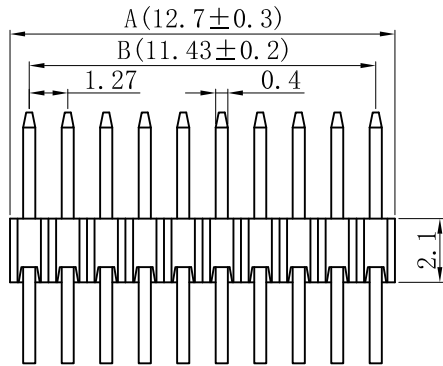


REV NO.	REVISION NOTE	REVISER	DATE
VO	NEW DRAWING		2023/01/05

客户编码	XX-XXX
------	--------

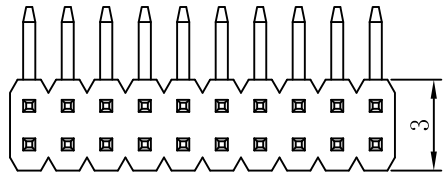

**SPECIFICATIONS**  
 Current Rating: 1.0Amps  
 Contact Resistance: 20mΩ Max  
 Insulator Resistance: 1000 MΩ Min.  
 Dielectric Withstanding: 500VAC/minute  
 Operating Temperature: -40°C~+105°C  
 Max Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

**MATERIALS:**  
 Contact Material: Brass  
 Contact Plating: Gold or Tin over 50u"Ni  
 Insulator Material: Glass Filled Polyester(UL94V-0)  
 Standard:PA6T

- 备注:  
 1、A= 1.27 X No. of Positions  
 2、B= 1.27 X No. of Contacts - 1.27  
 3、材质: PA6T 颜色: 黑色  
 4、方针表层镀金0.8 μ"

<b>cisconn</b> Http://www.cisconn.com		深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372			
Tolerance Unless Otherwise Specified	Title	PH1.27x2.1 2x10P 双排单塑排针 90° PA6T			
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	4:1	VO	XXXX-XXXXXX-XXX-XX
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approvai By
Angle ~ ± 3°	设计人	2023/01/05			