

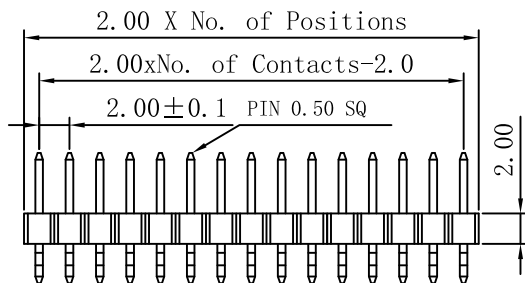



REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/01/06

打印日期:2023/1/7 15:14:42

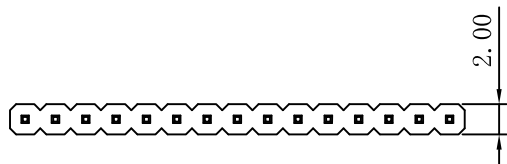

### SPECIFICATIONS

Current Rating:2AMP  
 Contact Resistance:20mΩ Max  
 Insulation Resistance:1000MΩ Min  
 Withstand Voltage:500V AC/minute  
 Operation Temperature:-40℃ to +105℃  
 Contact Material: Brass  
 Contact Plating: Au or Sn over 50 μ Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard:PA6T

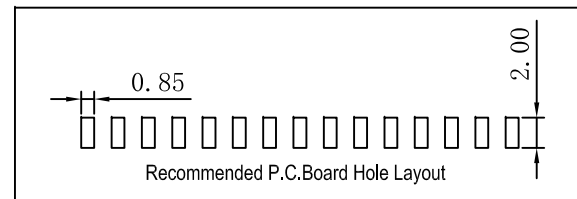

B

B

A

A

		深圳市新世联电子有限公司			
Http://www.cisconn.com		TEL:+86(755)29912370 FAX:29912372			
Tolerance Unless Otherwise Specified	Title	PH2.0排针 单排单塑 卧贴			
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	4:1	V0	xxxx-xxxx-xxx-xx
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approvai By Date
Angle ~ ± 3°	设计人	2023/01/06			