



REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/01/07


客户编码	XX-XXX
------	--------

打印日期:2023/1/9 15:25:53

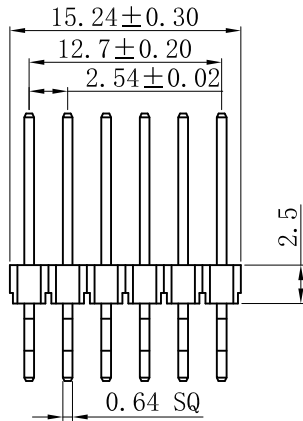

SPECIFICATIONS

Current Rating:3A
 Contact Resistance:20mΩ Max
 Insulator resistance:1000MΩ Min
 Dielectric withstandinga:AC 500V
 Operating Temperature:-40°C~ +105°C
 Contact Material:Brass or Phosphor bronze
 Insulator Material:Polyester,UL94V-0
 Standard:PA6T

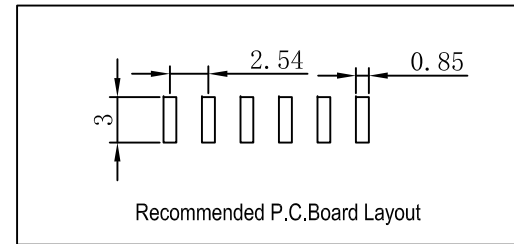

B

B

A

A

		深圳市新世联电子有限公司				
Http://www.cisconn.com		TEL:+86(755)29912370 FAX:29912372				
Tolerance Unless Otherwise Specified	Title	PH2.54 1x6P单排单塑排针 卧贴 PA6T PA10 镀金0.8μ"				
.X ~ ±0.30		Units	Scale	REV NO.	Material No.	
.XX ~ ±0.25		mm	2:1	V0	XXXX-XXXXXX-XXX-XX	
.XXX ~ ±0.20		Drawing By	Date	Reviewed By	Date	Approvai By
Angle ~ ± 3°		ChenShan	2023/01/07			