

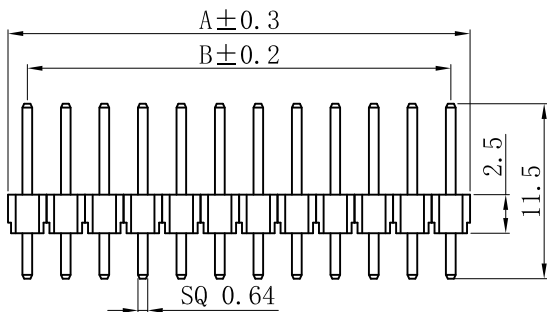


REV NO.	REVISION NOTE	REVISER	DATE
VO	NEW DRAWING		2023/01/09

客户编码	XX-XXX
------	--------

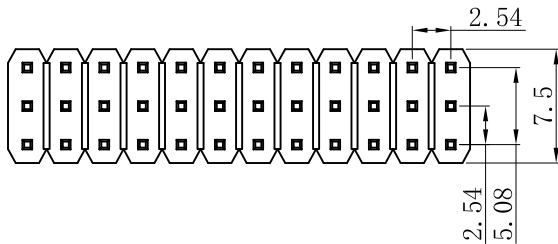


### APPLICATION AND FEATURES

- 1.Side on end stackable(on unbrken edges).
- 2.Noteches for easy breakable.
- 3.Maintains the dimension between two P.C Board.
- 4.Varizble pin length,gold or tin plated.
- 5.Standlffs facilitate plsty solderingt clean.

### SPECIFICATIONS

Current Rating:3A  
 Contact Resistance:20mΩ Max  
 Insulator resistance:1000MΩ Min  
 Dielectric withstanding:AC 500V  
 Operating Temperature:-40°C~ +105°C  
 Contact Material:Brass or Phosphor bronze  
 Lnsuiator Material:Polyester,UL94V-0  
 Standard:P.B.T

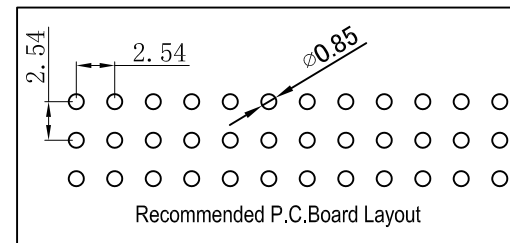

#### 备注:

- 1、A= 2.54 X No. of Positions
- 2、B= 2.54 X No. of Contacts - 2.54
- 3、胶壳用常规标准胶壳, 2xNo. of Contacts
- 4、材质: PBT 颜色: 黑色
- 5、端子表层镀金足0.8 μ"

<b>cisconn</b> Http://www.cisconn.com		深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372				
Tolerance Unless Otherwise Specified	Title	PH2.54 三排单塑排针 DIP PBT				
.X ~ ±0.30		Units	Scale	REV NO.	Material No.	
.XX ~ ±0.25		mm	2:1	VO	XXXX-XXXXXX-XXX-XX	
.XXX ~ ±0.20		Drawing By	Date	Reviewed By	Date	Approvai By
Angle ~ ± 3°		ChenShan	2023/01/09			

打印日期:2023/1/9 14:02:06

B

A