
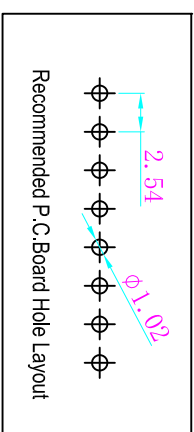

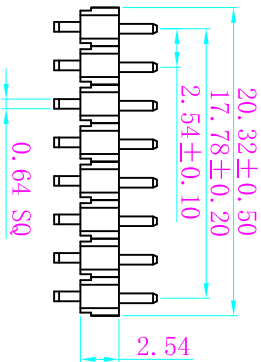


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/01/07

客户编码

XX-XXX



### APPLICATION AND FEATURES

- 1.Side on end stackable(on unbrlken edges).
- 2.Notches for easy breakable.
- 3.Maintains the dimension between two P.C Board.
- 4.Varizible pin length,gold or tin plated.
- 5.Standlffs facilitate plsty solderingt clean.

### SPECIFICATIONS

Current Rating:3A  
 Contact Resistance:20mΩ Max  
 Insulator resistance:1000MΩ Min  
 Dielectric withstandinga:AC 500V  
 Operating Temperature:-40°C~ +105°C  
 Contact Material:Brass or Phosphor bronze  
 Insulator Material:Polyester,UL94V-0  
 Standard:P.B.T

- 备注:
- 1、A= 2.54 X No. of Positions
  - 2、B= 2.54 X No. of Contacts - 2.54
  - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
  - 4、材质: PBT 颜色: 黑色
  - 5、方针表层镀金足0.8 μ”

<a href="http://www.ciscomn.com">Http://www.ciscomn.com</a>				深圳市新世纪电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	Units	Scale	REV NO.	Material No.
.X ~ ±0.30		mm	2:1	V0	XXXX-XXXX-XXX-XX
.XX ~ ±0.25	Drawing By	Date	Reviewed By	Date	Approval By
.XXX ~ ±0.20	ChenShan	2023/01/07			
Angle ~ ± 3°					