
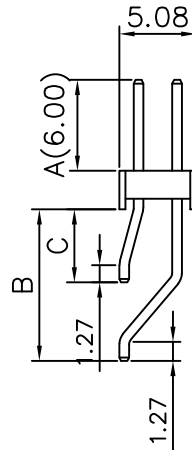
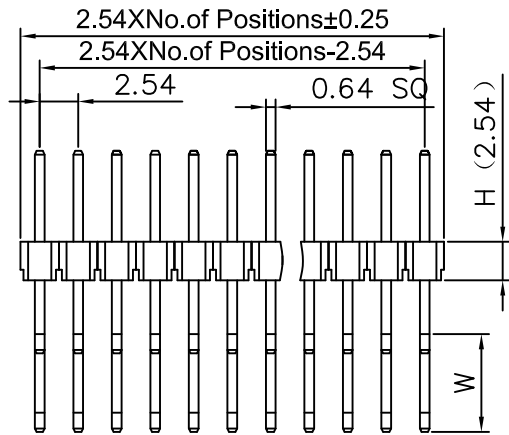


REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/01/07

打印日期:2023/1/9 14:24:45


B

A

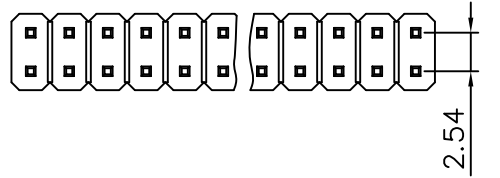

**SPECIFICATIONS**

Current Rating:3A  
 Contact Resistance: 30mΩ Max  
 Insulator resistance:1000MΩ Min  
 Dielectric withstanding:AC 500V  
 Operating Temperature:-40°C~ +105°C  
 Contact Material:Brass or Phosphor bronze  
 Insulator Material:Polyester,UL94V-0  
 Standard:P.B.T  
 Finish:Tin,gold Duplex plated  
 Note:  
 Duplex plating:gold plated on contact area,  
 Tin on solder area

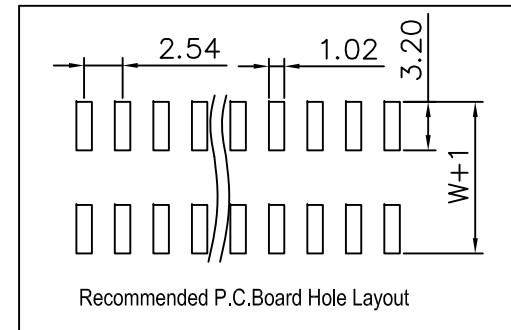

		深圳市新世联电子有限公司 Http://www.cisconn.com TEL:+86(755)29912370 FAX:29912372			
Tolerance Unless Otherwise Specified		Title		PH2.54 双排单塑排针 卧贴	
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	2:1	V0	XXXX-XXXX-XX-XX
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approval By Date
Angle ~ ± 3°	ChenShan	2023/01/07			

D

C

B

A