
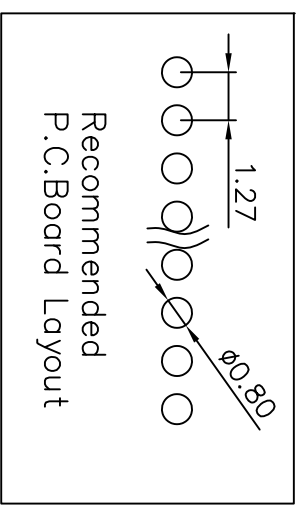
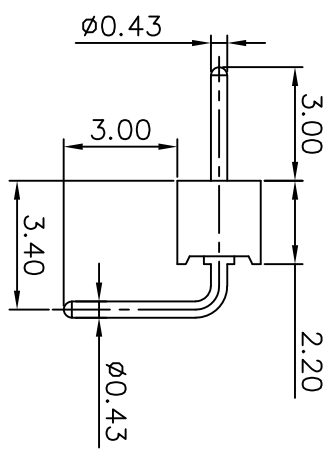


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/22

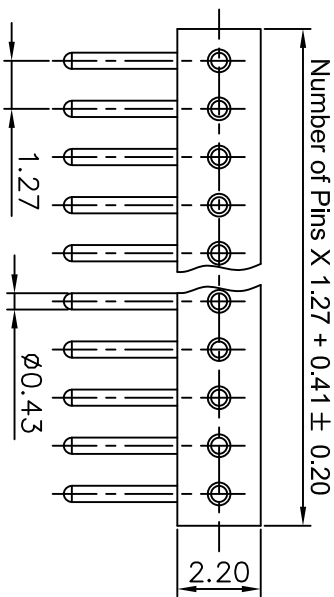

**Technical Specs:**  
 Insulator: Black glass filled polyester PA46-GF30-FR  
 Flammability: UL 94V-O  
 Sleeve: Brass CuZn36Pb3 (C36000)  
 Mechanical life: min 500 cycles  
 Rated current: 1 A  
 Contact resistance: max 20 Milliohms  
 Dielectric strength: min 500 V RMS

<a href="http://www.ciscomn.com">Http://www.ciscomn.com</a>				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title		1.27MM圆PIN排针 RA	
.X ~ ±0.30	⊕	Units	Scale	REV NO.	Material No.
.XX ~ ±0.25	⊖	mm	2:1	V0	
.XXX ~ ±0.20		Date	Reviewed By	Date	Approval By
Angle ~ ± 3°		2023/02/22			