


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/22



客户编码

XXX-XXX

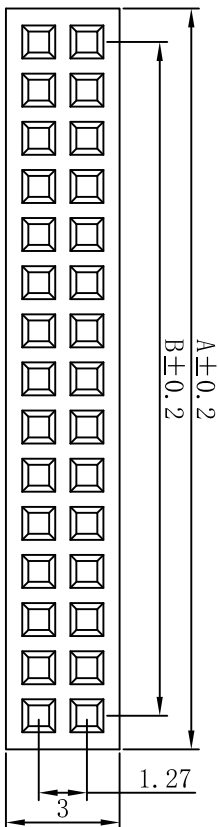


H=2, 0mm
H=3, 4mm
H=4, 3mm
H=4, 4mm

SPECIFICATIONS
 Current Rating:1.0AMP
 Contact Resistance:30mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstand Voltage:500V AC/minute
 Operation Temperature:-40℃ to +105℃
 Contact Material: Brass
 Contact Plating: Au or Sn over 50 μ" Ni
 Insulator Material: Polyester(UL94V-0)
 Standard:PA6T

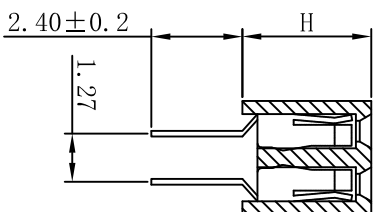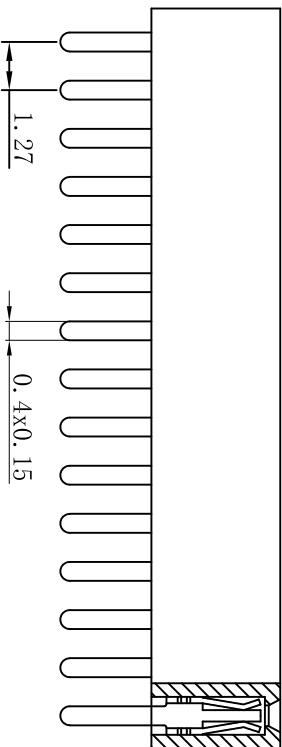

Pin	Dimensions		Pin	Dimensions	
	A	B		A	B
2x1P	--	--	2x21P	27.17	25.40
2x2P	3.04	1.27	2x22P	28.44	26.67
2x3P	4.31	2.54	2x23P	29.71	27.94
2x4P	5.58	3.81	2x24P	30.98	29.21
2x5P	6.85	5.08	2x25P	32.25	30.48
2x6P	8.12	6.35	2x26P	33.52	31.75
2x7P	9.39	7.62	2x27P	34.79	33.02
2x8P	10.66	8.89	2x28P	36.06	34.29
2x9P	11.93	10.16	2x29P	37.33	35.56
2x10P	13.20	11.43	2x30P	38.60	36.83
2x11P	14.47	12.70	2x31P	39.87	38.10
2x12P	15.74	13.97	2x32P	41.14	39.37
2x13P	17.01	15.24	2x33P	42.41	40.64
2x14P	18.28	16.51	2x34P	43.68	41.91
2x15P	19.55	17.78	2x35P	44.95	43.18
2x16P	20.82	19.05	2x36P	46.22	44.45
2x17P	22.09	20.32	2x37P	47.49	45.72
2x18P	23.36	21.59	2x38P	48.76	46.99
2x19P	24.63	22.86	2x39P	50.03	48.26
2x20P	25.90	24.13	2x40P	51.30	49.53

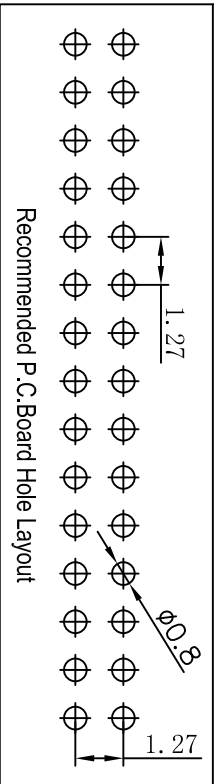

Http://www.ciscomn.com 		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	Units	Scale
.X ~ ±0.30		mm	4:1
.XX ~ ±0.25			
.XXX ~ ±0.20	Drawing By	Date	REV NO.
Angle ~ ± 3°	ChenShan	2023/02/22	V0
	Reviewed By	Date	Material No.
			XXXXX-XXXXX-XXX-XX
			Approval By
			Date