


| REV. NO. | REVISION NOTE | REVISER | DATE |
|----------|---------------|---------|------------|
| V0 | NEW DRAWING | | 2023/02/22 |

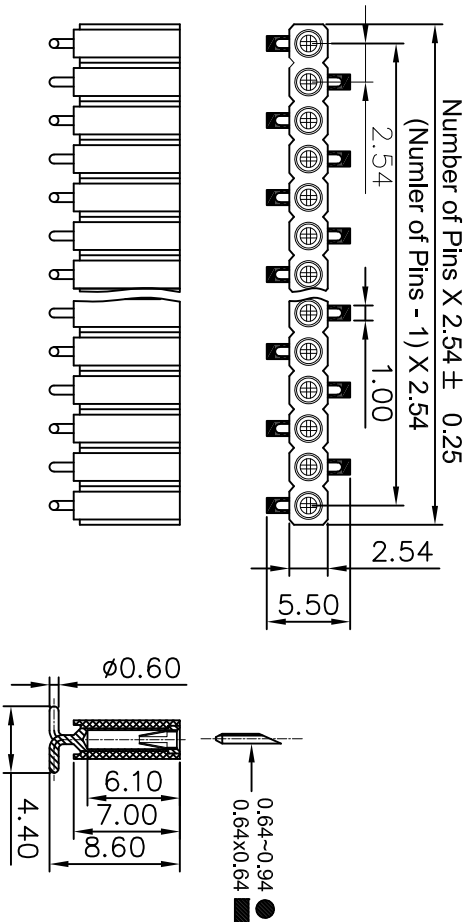

Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3 (C36000)
 Contact clip (6 finger): Beryllium copper (C17200)
 Mating pins: Outside Diameter 0.70 to 0.90 mm
 Forces: (polished steel gauge 0.64 mm)
 Insertion: 2 N typ.
 Withdrawal: 1 N typ.
 Mechanical life: min 500 cycles
 Rated current: 3 A
 Contact resistance: max 20 Milliohms
 Dielectric strength: min 1000 V RMS
 Coplanarity SMDterminations: max 0.1 mm
 (measured on 25 mm long connectors)

| | | | | | |
|---|---|------------|-------------|--|--------------|
| Http://www.ciscomm.com | | | | 深圳市新世联电子有限公司 TEL.:+86(755)29912370 FAX:29912372 | |
| Tolerance Unless Otherwise Specified | | Title | | 2.54MM间距排母 SMT | |
| .X ~ ±0.30 | ⌀ | Units | Scale | REV NO. | Material No. |
| .XX ~ ±0.25 | □ | mm | 2:1 | V0 | |
| .XXX ~ ±0.20 | | Date | Reviewed By | Date | Approval By |
| Angle ~ ± 3° | | 2023/02/22 | | | |