



REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/24

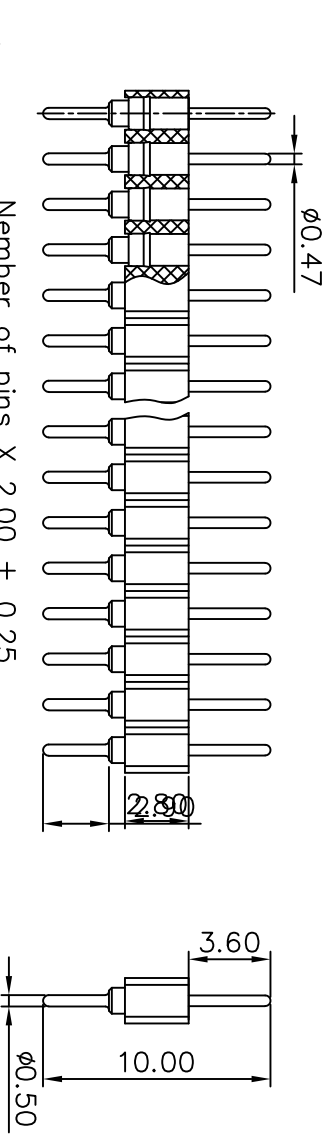

Technical Specs:
 Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Sleeve: Brass CuZn36Pb3 (C36000)
 Contact clip (4 finger): Beryllium copper (C17200)
 Mating pins: Outside Diameter 0.43 to 0.56 mm
 Forces: (polished steel gauge 0.51 mm)
 Insertion: 2 N typ.
 Withdrawal: 1 N typ.
 Mechanical life: min 500 cycles
 Rated current: 3 A
 Contact resistance: max 20 Milliohms
 Dielectric strength: min 1000 V RMS

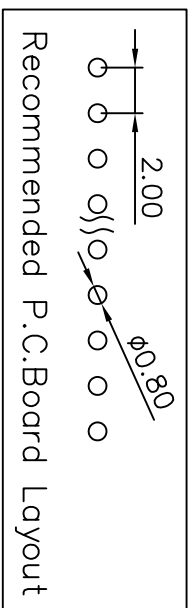

		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Http://www.ciscomm.com		2.0MM圆PIN排针 DIP	
Tolerance Unless Otherwise Specified		Title	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20		Date	REV NO.
Angle ~ ± 3°		2023/02/24	V0
		Reviewed By	Material No.
		Date	Approval By
		Date	Date