



REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/24

保存日期:2013/11/23 15:57:47


编制日期:2023/02/24

2

1

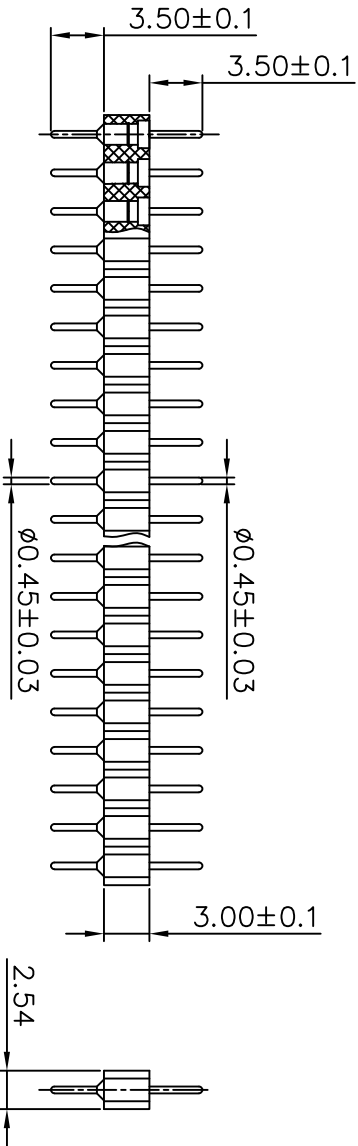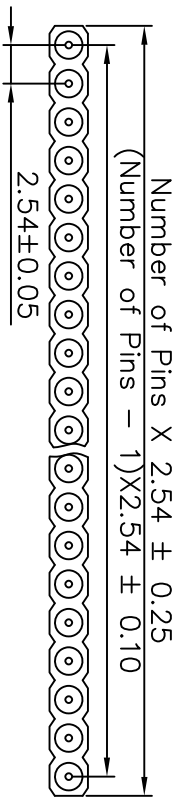

Technical Specs:
 Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3 (C36000)
 Mechanical life: min 500 cycles
 Rated current: 3 A
 Contact resistance: max 20 Milliohms
 Dielectric strength: min 1000 V RMS
 Coplanarity SMDterminations: max 0.1 mm
 (measured on 25 mm long connectors)

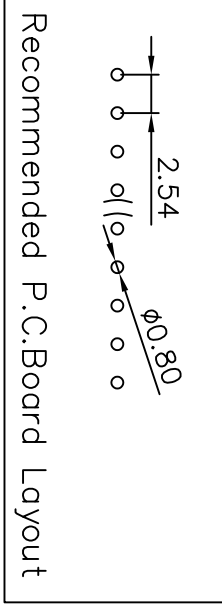

Http://www.ciscomn.com		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title 2.54MM间距排针 DIP	
.X ~ ±0.30	⌀	Units mm	Scale 2:1
.XX ~ ±0.25	□	Date 2023/02/24	REV NO. V0
.XXX ~ ±0.20	∠	Angle ~ ± 3°	Reviewed By Date
Drawing By 2023/02/24		Material No. Approval By Date	

4

3

2

1