


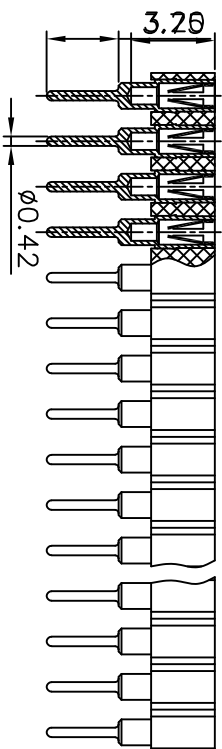


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/22

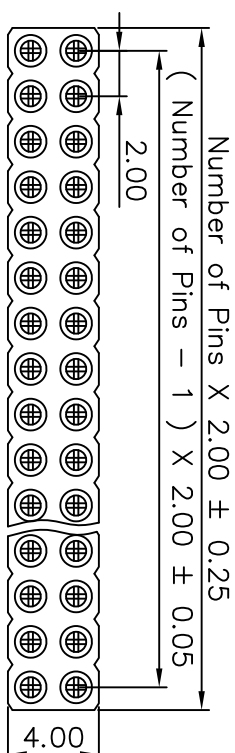

Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Sleeve: Brass CuZn36Pb3 (C36000)
 Contact clip (4 finger): Beryllium copper (C17200)
 Mating pins: Outside Diameter 0.43 to 0.56 mm
 Forces: (polished steel gauge 0.51 mm)
 Insertion: 2 N typ.
 Withdrawal: 1 N typ.
 Mechanical life: min 500 cycles
 Rated current: 3 A
 Contact resistance: max 20 Milliohms
 Dielectric strength: min 1000 V RMS

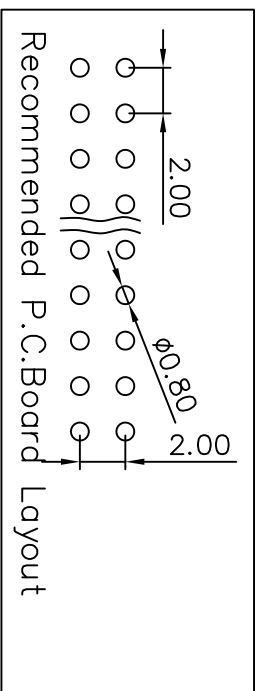

Recommended P.C.Board Layout

Http://www.ciscomn.com		深圳市新世联电子有限公司 TEL.:+86(755)29912370 FAX:29912372	
Tolerance Unless Otherwise Specified		Title	
.X ~ ±0.30	⌀	Units	2.0MM圆PIN排母 DIP
.XX ~ ±0.25	□	Scale	2:1
.XXX ~ ±0.20		Date	2023/02/22
Angle ~ ± 3°		Reviewed By	
		Date	
		Approval By	
		Date	