


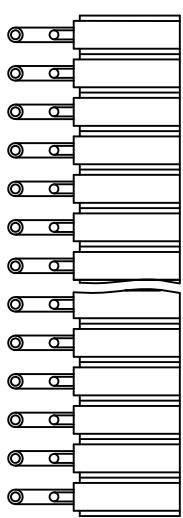


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/22

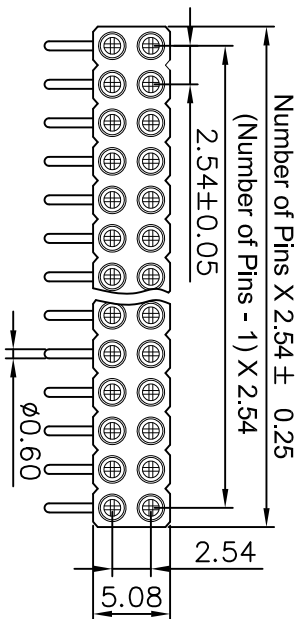

**Technical Specs:**

- Insulator: Black glass filled polyester PPS-GF30-FR
- Flammability: UL 94V-O
- Sleeve: Brass CuZn36Pb3 (C36000)
- Contact clip (6 finger): Beryllium copper (C17200)
- Mating pins: Outside Diameter 0.70 to 0.90 mm
- Forces: (polished steel gauge 0.64 mm)
- Insertion: 2 N typ.
- Withdrawal: 1 N typ.
- Mechanical life: min 500 cycles
- Rated current: 3 A
- Contact resistance: max 20 Milliohms
- Dielectric strength: min 1000 V RMS
- Coplanarity SMDterminations: max 0.1 mm (measured on 25 mm long connectors)

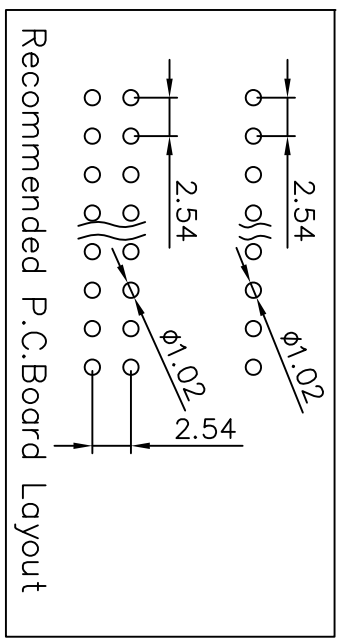

Recommended P.C.Board Layout

		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Http://www.ciscomn.com		2.54MM PIN排母 RA	
Tolerance Unless Otherwise Specified		Title	
.X ~ ±0.30	⊕	Units	Scale
.XX ~ ±0.25	⊕	mm	2:1
.XXX ~ ±0.20	⊕	Date	Reviewed By
Angle ~ ± 3°	⊕	2023/02/22	Date
		REV NO.	Material No.
		V0	
		Approval By	Date