



| REV. NO. | REVISION NOTE | REVISER | DATE |
|----------|---------------|---------|------------|
| V0 | NEW DRAWING | | 2023/02/22 |

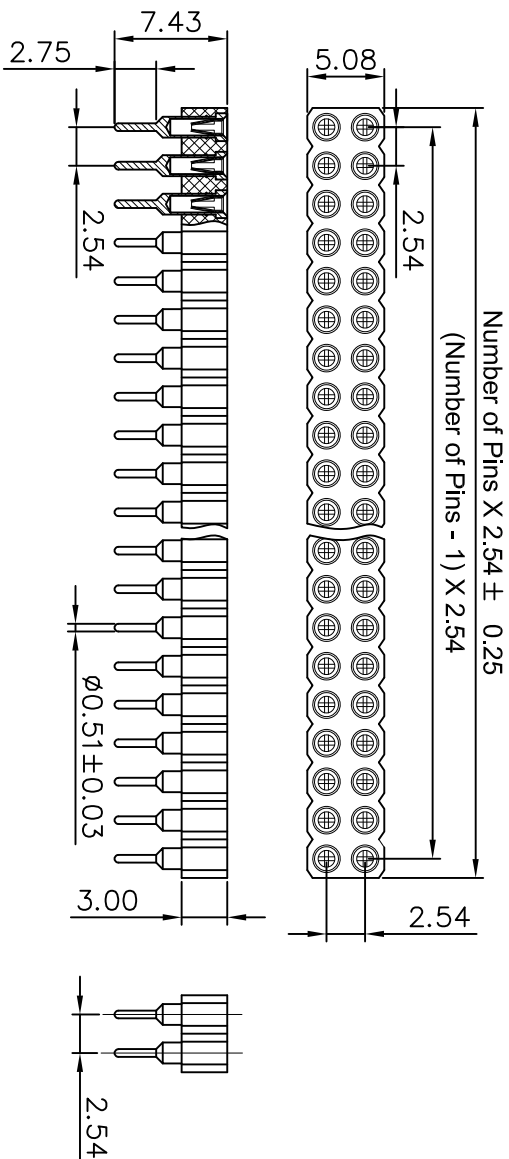

Technical Specs:
 Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3 (C36000)
 Contact clip (4 finger): Beryllium copper (C17200)
 Mating pins: Outside Diameter 0.43 to 0.56 mm
 Forces: (polished steel gauge 0.51 mm)
 Insertion: 2 N typ.
 Withdrawal: 1 N typ.
 Mechanical life: min 500 cycles
 Rated current: 3 A
 Contact resistance: max 20 Milliohms
 Dielectric strength: min 1000 V RMS

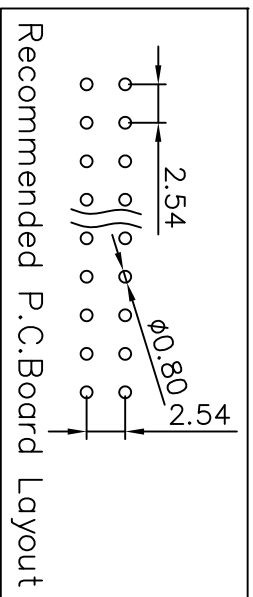

A

B

4

3

2

1

| | | | |
|---|--|--|------------------|
| Http://www.ciscomn.com | | 深圳市新世联电子有限公司 TEL.: +86 (755) 29912370 FAX: 29912372 | |
| Tolerance Unless Otherwise Specified | | Title | |
| .X ~ ±0.30 | | Units | 2.54MM圆PIN排母 DIP |
| .XX ~ ±0.25 | | Scale | 2:1 |
| .XXX ~ ±0.20 | | REV NO. | V0 |
| Angle ~ ± 3° | | Reviewed By | Date |
| | | Approval By | Date |

A

B

C

D