
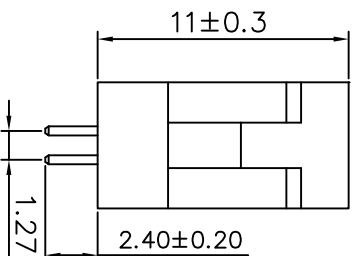
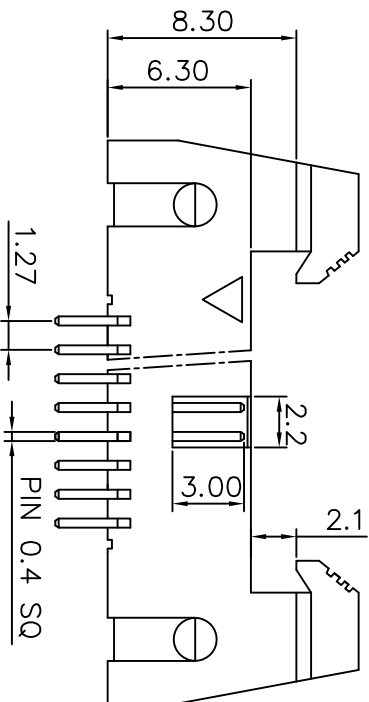


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/22

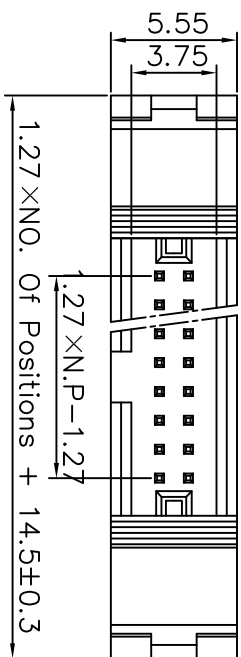


**Electrical Data:**

Current rating: 1.0Amps  
 Dielectric Withstanding Voltage: 500VAC for one minute  
 Contact Resistance: < 20 mΩ  
 Insulation Resistance: > 1000 MΩ  
 Operating Temperature: -40°C ~ +105°C

**Construction:**

Insulator: Black Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of copper alloy  
 Contacts plating: Selective gold on surface contact area  
 Standard: PA6T

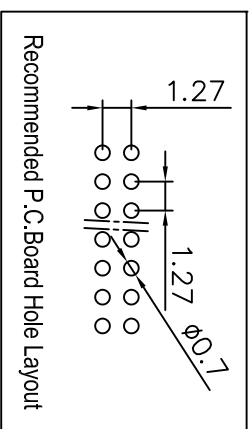

		深圳市新世联电子有限公司 TEL.:+86(755)29912370 FAX:29912372	
Http://www.ciscom.com		PH1.27 黑色牛角 DIP	
Tolerance Unless Otherwise Specified		Title	
.X ~ ±0.30	⊙	Units	Scale
.XX ~ ±0.25	⊕	mm	1:1
.XXX ~ ±0.20		Date	REV NO.
Angle ~ ± 3°		2023/02/22	V0
		Design By 设计人	Reviewed By
			Date
			Approval By
			Date