

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/22

客户编码





XX-XXX

Electrical Data:

Current rating: Lamps
 Dielectric Withstanding Voltage: 500VAC for one minute
 Contact Resistance: $< 20\text{ m}\Omega$
 Insulation Resistance: $> 1000\text{ M}\Omega$
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Construction:

Insulator: Black Glass Filled Polyester
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area
 Standard:PA6T
 PA6T soldering temperature resistance up to 260°C

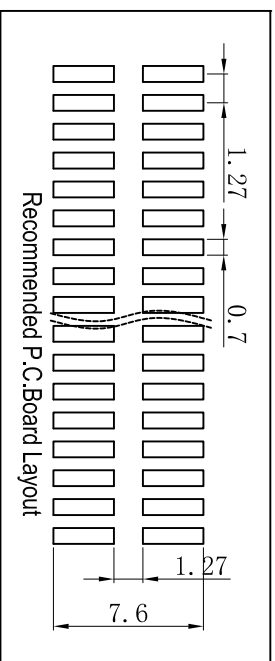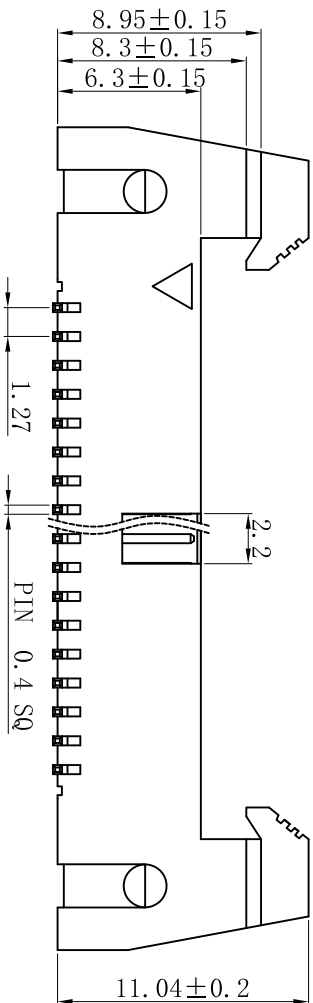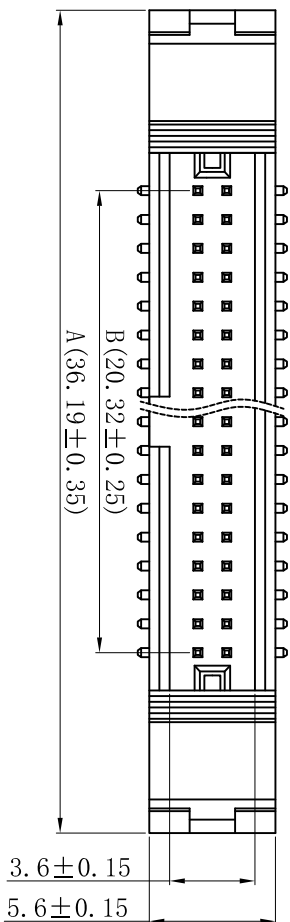

- 备注:
- 1、A= 1.27 X No. of Positions+14.6
 - 2、B= 1.27 X No. of Contacts - 1.27
 - 3、胶壳用常规标准胶壳, 2XNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、表层镀金2U
 - 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

[Http://www.ciscom.com](http://www.ciscom.com)

深圳市新世联电子有限公司

TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless
Otherwise Specified

Title

PHI.27 2x17P 黑色牛角 SMT PA6T 镀金2U

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

Units

Scale

REV NO.

Material No.

Drawing By

Date

Reviewed By

Date

设计人

2023/02/22

A

B

打印日期:2023/2/23 9:10:59

4

3

2

1

A

B

C

D