
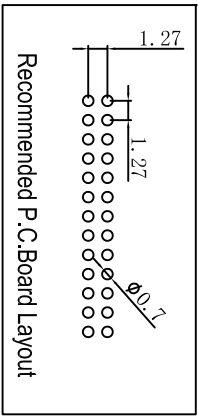

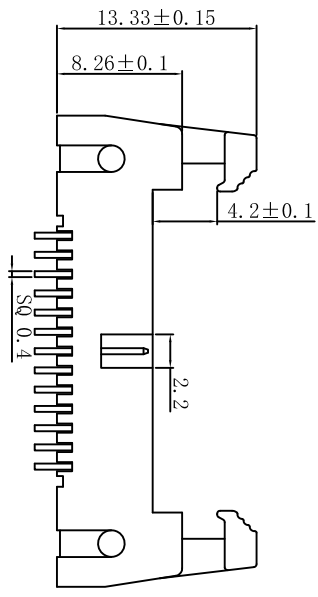


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/22

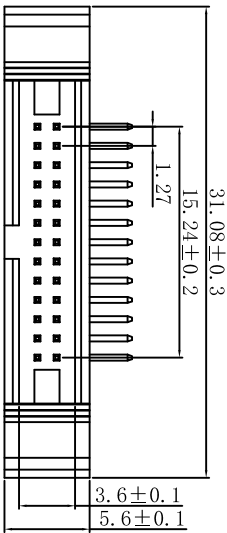

Electrical Data:

Current rating: 1Amps
 Dielectric Withstanding Voltage: 500VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40° C ~ +105° C

Construction:

Insulator: Black Glass Filled Polyester
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area
 Standard:PA6T
 PA6T soldering temperature resistance up to 260 ° C

		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Http://www.cisconn.com			
Tolerance Unless Otherwise Specified		Title	
.X ~ ±0.30		PH1.27 2x13P 黑色牛角 高耳 90度 PA6T 镀金1μ"	
.XX ~ ±0.25		Units	Scale
.XXX ~ ±0.20	mm	1:1	REV NO.
Angle ~ ± 3°	Design By	Date	Reviewed By
	设计人	2023/02/22	Date
			Approval By
			Date
			Material No.