
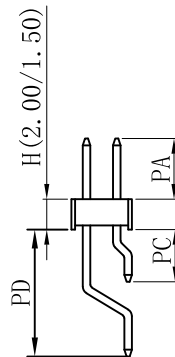
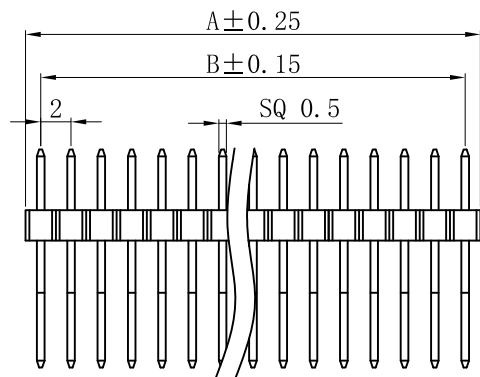


REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09


客户编码	XX-XXX
------	--------

打印日期:2023/5/9 16:18:38



SPECIFICATIONS

Current Rating:2AMP
 Contact Resistance:30mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstand Voltage:500V AC/minute
 Operation Temperature:-40°C to +105°C
 Contact Material: Brass
 Plating:gold
 Insulator Material:Polyester(UL94V-0)
 Standard:PA6T
 PA6T resistance to high temperature 250°C



备注:

- 1、A= 2.00 X No. of Positions
- 2、B= 2.00 X No. of Contacts - 2.00
- 3、胶壳用常规标准胶壳, 2xNo. of Contacts
- 4、材质: PA6T 颜色: 黑色
- 5、方针表层镀金0.8 μ"
- 6、PA/PC/PD 依据客户要求

cisconn Http://www.cisconn.com		深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372			
Tolerance Unless Otherwise Specified	Title	排针2.00mm 双排 卧贴 (塑高2.0)			
.X ~ ±0.30	⊕	Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	2:1	V0	XXXXX-XXXXXX-XXX-XX
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approvai By
Angle ~ ± 3°	LiuYang	2023/05/09			