


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/24

客户编码

XX-XXX

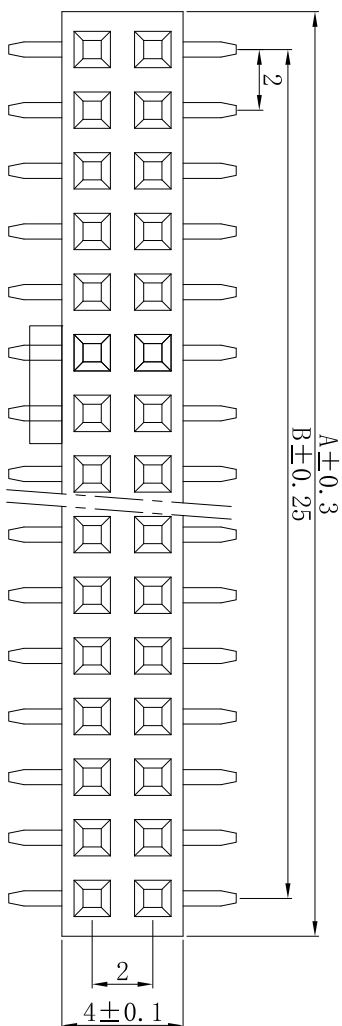

SPECIFICATIONS

Current Rating:2.0AMP

Contact Resistance:30mΩ Max

Insulation Resistance:1000MΩ Min

Withstand Voltage:500V AC/minute


Operation Temperature:-40℃ to +105℃

Contact Material: Brass


Contact Plating: Au or Sn over 50 μ" Ni

Insulator Material: Polyester(UL94V-0)

Standard: PA6T

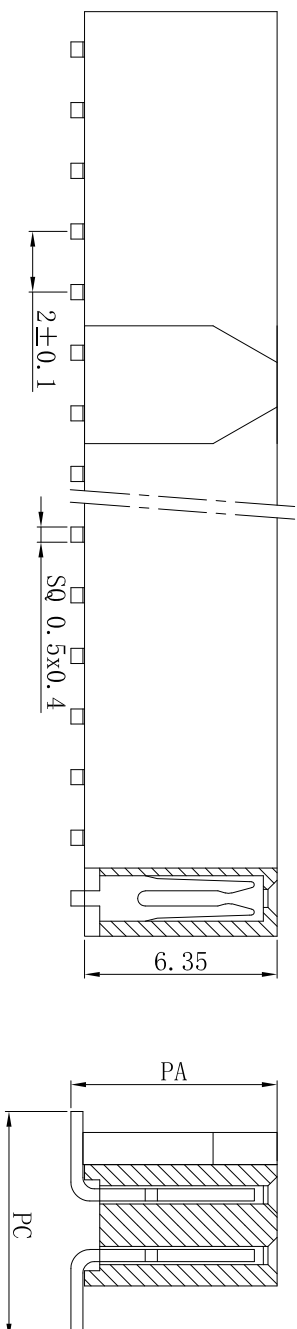

- 备注:
- 1、A= 2.00X No. of Positions + 0.5
 - 2、B= 2.00 X No. of Contacts - 2.00
 - 3、C= 2.00 X No. of Contacts - 4.00
 - 4、胶壳用常规标准胶壳，2xNo. of Contacts
 - 5、材质：PA6T 颜色：黑色
 - 6、端子表层镀金0.8 μ"

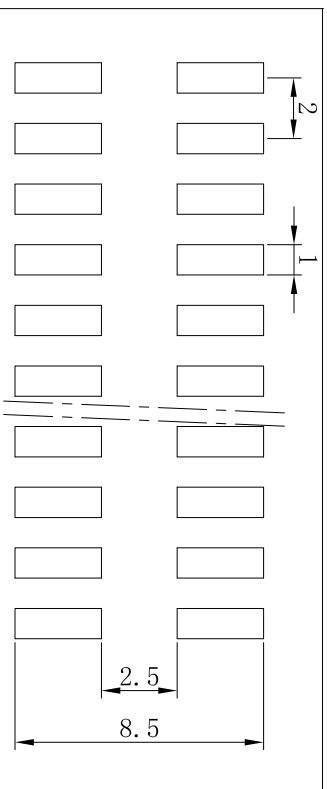

Recommended

P.C.Board Layout

http://www.ciscomn.com				深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372	
Tolerance Unless Otherwise Specified	Title	排母2.0mm 双排 立贴 (塑高6.35) Y型 带凸			
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	4:1	V0	XXXX-XXXX-XXX-XX
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approval By
Angle ~ ± 3°	LiuYang	2023/05/24			