

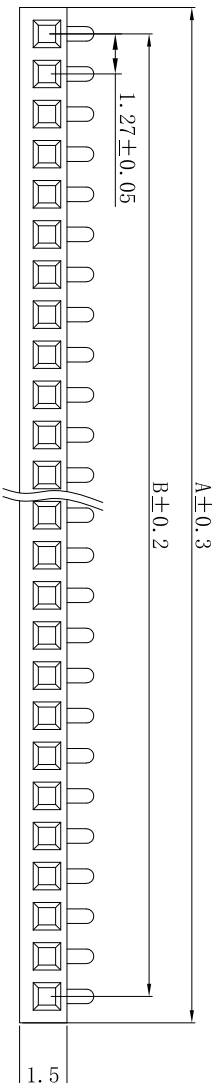
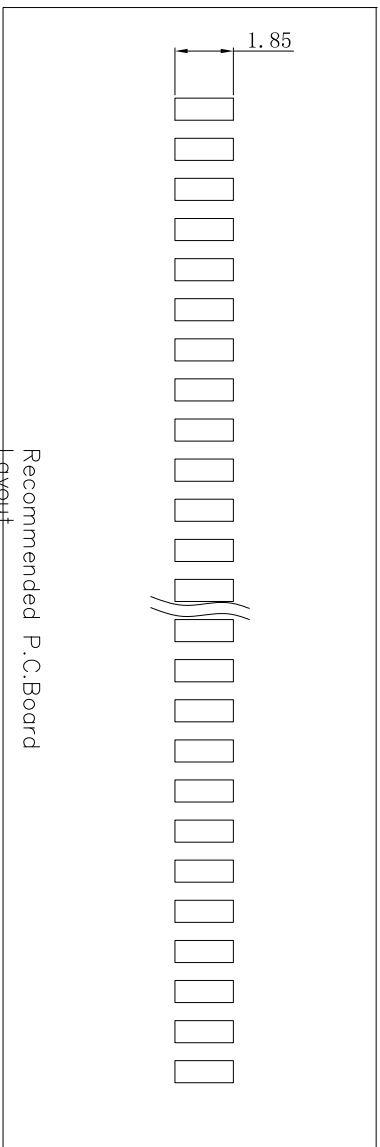


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09



SPECIFICATIONS

Current Rating:1.0AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating:gold
Insulator Material:Polyester(UL94V-0)
Standard:PA6T
PA6T weldable temperature up to 250°C

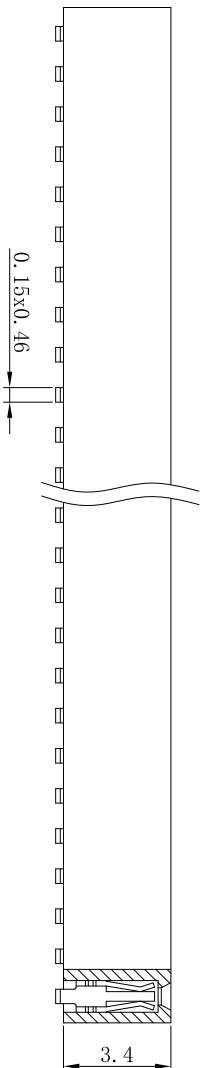

Recommended P.C.Board
Layout

- 备注:
- 1、A= 1.27X No. of Positions + 0.4
 - 2、B= 1.27 X No. of Contacts - 1.27
 - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、端子表层镀金0.8μ"

Http://www.ciscomn.com				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title		排母1.27mm 单排 立贴 (塑高3.4) U型	
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	4:1	V0	XXXXX-XXXXX-XXX-XX
.XXX ~ ±0.20		Date	Reviewed By	Date	Approval By
Angle ~ ± 3°		Drawing By	LiuYang	2023/05/09	