
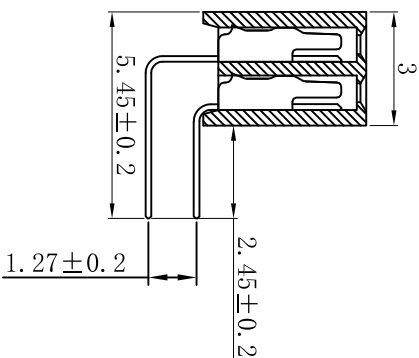
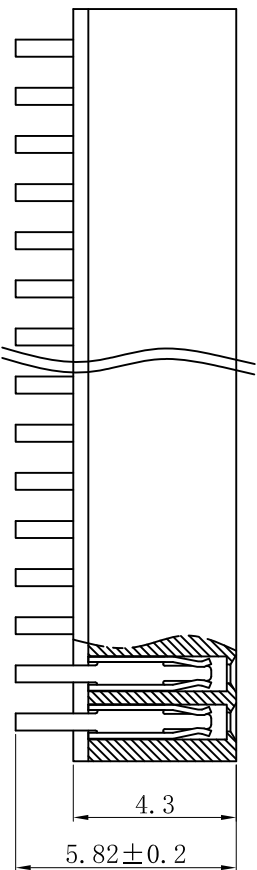


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09


客户编码

XXX-XXX

SPECIFICATIONS
 Current Rating:1.0AMP
 Contact Resistance:20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstand Voltage:500V AC/minute
 Operation Temperature:-40℃ to +260℃
 Contact Material: Brass
 Contact Plating: Au or Sn over 50 μ "Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PA6T

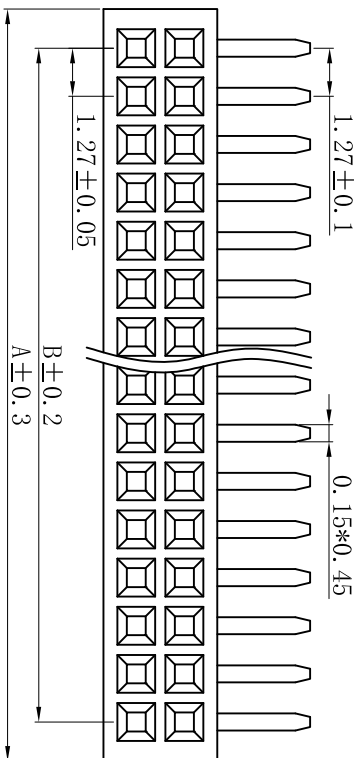

- 备注:
- 1、A= 1.27X No. of Positions + 0.4
 - 2、B= 1.27 X No. of Contacts - 1.27
 - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、端子表层镀金0.8 μ "

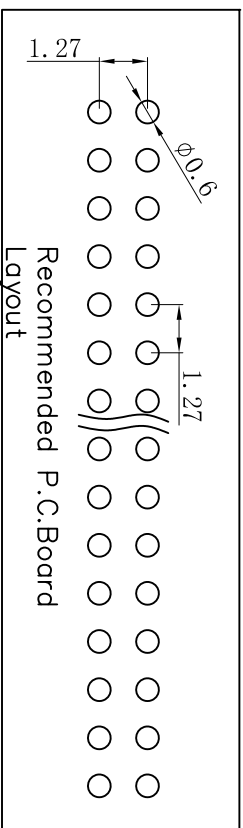

Recommended P.C.Board Layout

		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Http://www.ciscom.com		排母1.27mm 双排 90度 (塑高4.3) U型	
Tolerance Unless Otherwise Specified		Title	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	4:1
.XXX ~ ±0.20		Date	REV NO.
Angle ~ ± 3°		2023/05/09	V0
		Drawing By	Material No.
		LiuYang	XXXXX-XXXXX-XXX-XX
		2023/05/09	Reviewed By
			Date
			Approval By
			Date