

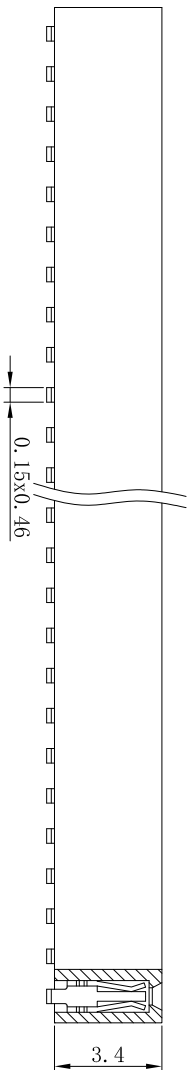


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09

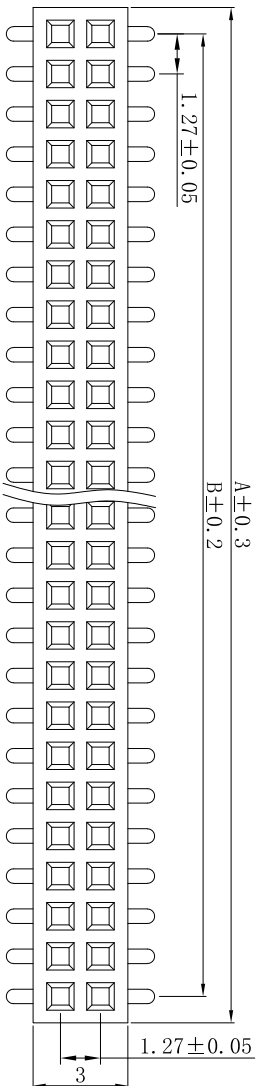


**SPECIFICATIONS**

Current Rating:1.0AMP  
 Contact Resistance:20mΩ Max  
 Insulation Resistance:1000MΩ Min  
 Withstand Voltage:500V AC/minute  
 Operation Temperature:-40℃ to +105℃  
 Contact Material: Brass  
 Contact Plating:gold  
 Insulator Material:Polyester(UL94V-0)  
 Standard:PA6T  
 PA6T weldable temperature up to 250°C

**备注:**

- 1、A= 1.27X No. of Positions + 0.4
- 2、B= 1.27 X No. of Contacts - 1.27
- 3、胶壳用带标准胶壳, 2XNo. of Contacts
- 4、材质: PA6T 颜色: 黑色
- 5、端子表层镀金0.8μ"

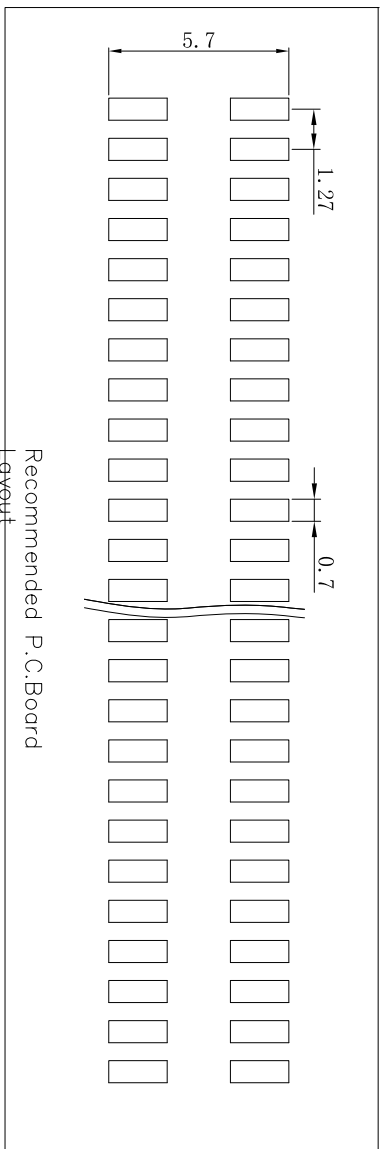

Recommended P.C.Board  
 Layout

<p>Http://www.ciscom.com</p>		<p>深圳市新世联电子有限公司</p> <p>TEL:+86(755)29912370 FAX:29912372</p>	
Tolerance Unless Otherwise Specified	Title	排母1.27mm 双排 立贴 (塑高3.4) U型	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	4:1
.XXX ~ ±0.20	Drawing By	Date	REV NO.
Angle ~ ± 3°	LiuYang	2023/05/09	V0
	Reviewed By	Date	Material No.
			XXXXX-XXXXX-XXX-XX
	Approval By	Date	