


| REV. NO. | REVISION NOTE | REVISER | DATE |
|----------|---------------|---------|------------|
| V0 | NEW DRAWING | | 2023/05/08 |

客户编码

XX-XXX

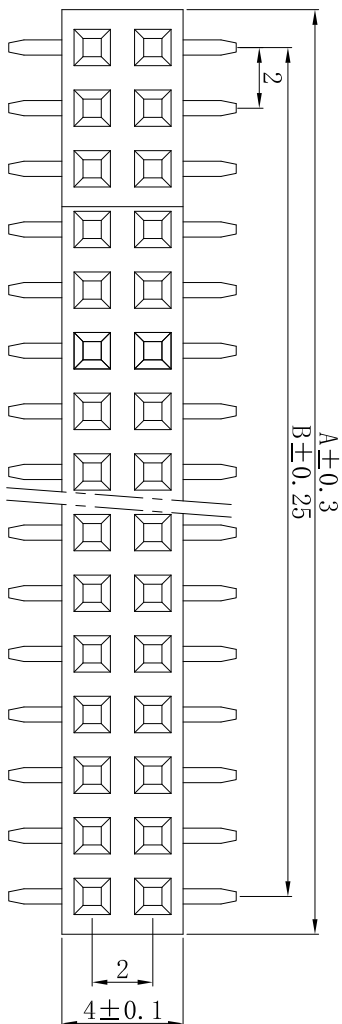

SPECIFICATIONS

Current Rating:2.0AMP

Contact Resistance:30mΩ Max

Insulation Resistance:1000MΩ Min

Withstand Voltage:500V AC/minute


Operation Temperature:-40℃ to +105℃

Contact Material: Brass


Contact Plating: Au or Sn over 50 μ" Ni

Insulator Material: Polyester(UL94V-0)

Standard: PA6T

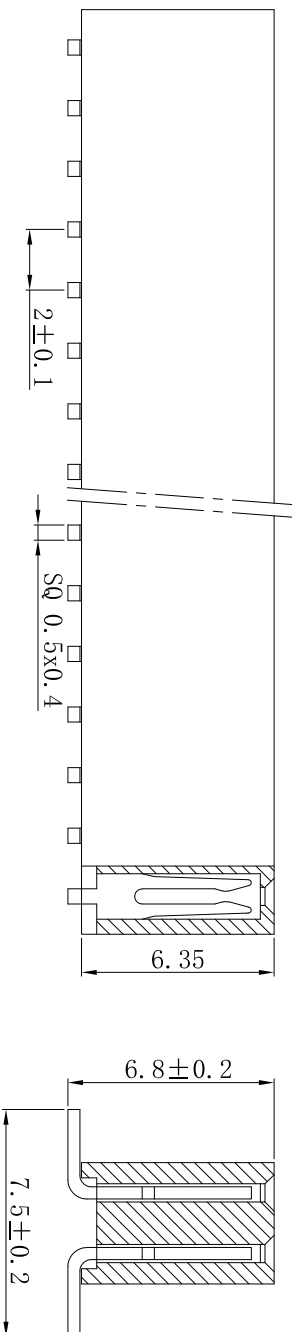


- 备注:
- 1、A= 2.00X No. of Positions + 0.5
 - 2、B= 2.00 X No. of Contacts - 2.00
 - 3、C= 2.00 X No. of Contacts - 4.00
 - 4、胶壳用常规标准胶壳，2XNo. of Contacts
 - 5、材质：PA6T 颜色：黑色
 - 6、端子表层镀金0.8 μ"

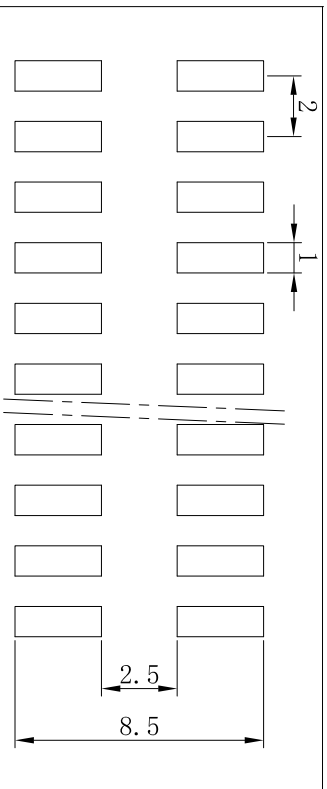

Recommended

P.C.Board Layout



Http://www.ciscomm.com

深圳市新世联电子有限公司

TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless
Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

Title

排母2.0mm 双排 立贴 (塑高6.35) Y型



Units

Scale

REV NO.

Material No.

Drawing By

Date

Reviewed By

Date

Approval By

LiuYang

2023/05/08