
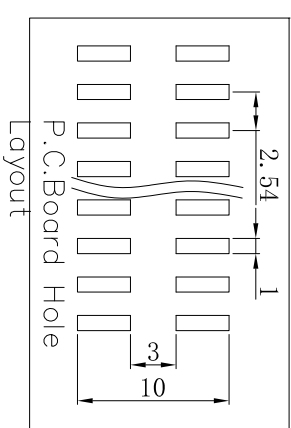

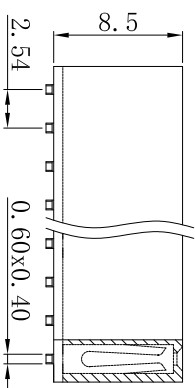


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码

XX-XXX

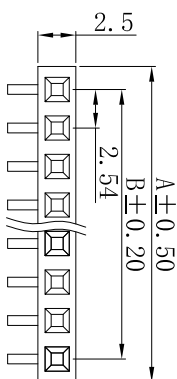

SPECIFICATIONS

Current Rating:3A
 Contact Resistance:30mΩ Max
 Insulator resistance:1000MΩ Min
 Dielectric withstanding:AC 500V
 Operating Temperature:-40°C~ +105°C
 Contact Material:Brass or Phosphor bronze
 Insulator Material:Polyester,UL94V-0
 Standard:PA6T

备注:

- 1、A= 2.54 X No. of Positions + 0.5
- 2、B= 2.54 X No. of Contacts - 2.54
- 3、胶壳用常规标准胶壳, 2xNo. of Contacts
- 4、材质: PA6T 颜色: 黑色
- 5、端子表层镀金0.8 μ"

Http://www.ciscomn.com				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title		排母2.54mm 单排 90度 (塑高8.5) Y型	
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	1:1	V0	XXXX-XXXX-XX-XX
.XXX ~ ±0.20		Date	Reviewed By	Date	Approval By
Angle ~ ± 3°		Drawing By	LiuYang	2023/05/11	