

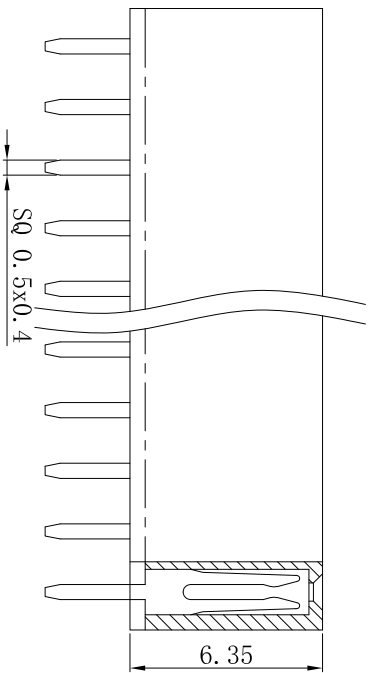


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09


客户编码

XXX-XXX

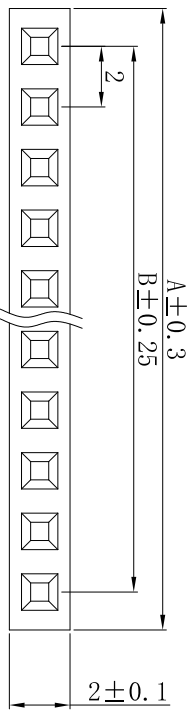

SPECIFICATIONS

Current Rating:2.0AMP
 Contact Resistance:20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstand Voltage:500V AC/minute
 Operation Temperature:-40℃ to +105℃
 Contact Material: Brass
 Contact Plating: Au or Sn over 50 μ "Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PA6T

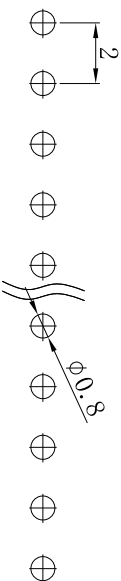

Recommended
 P.C.Board Layout

- 备注:
- 1、A= 2.00X No. of Positions + 0.5
 - 2、B= 2.00 X No. of Contacts - 2.00
 - 3、胶壳用常规标准胶壳, 2XNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、端子表层镀金0.8 μ "

<p>Http://www.ciscom.com</p>		<p>深圳市新世联电子有限公司</p> <p>TEL: +86 (755) 29912370 FAX: 29912372</p>	
Tolerance Unless Otherwise Specified	Title	排母2.0mm 单排 180度 (塑高6.35) Y型	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	4:1
.XXX ~ ±0.20	Drawing By	Date	Reviewed By
Angle ~ ± 3°	LiuYang	2023/05/09	
	REV NO.	Material No.	Approval By
	V0	XXXXX-XXXXX-XXX-XX	Date