

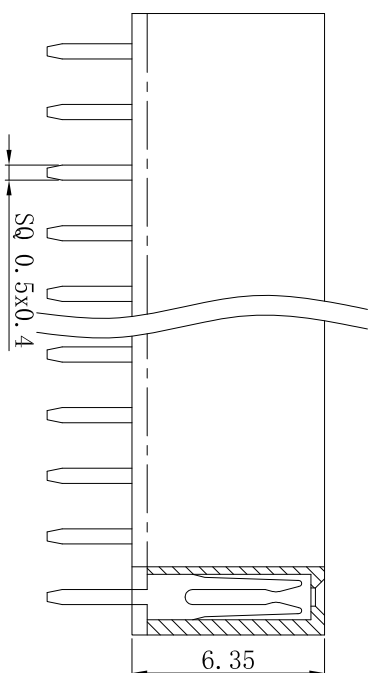


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09


客户编码

XXX-XXX

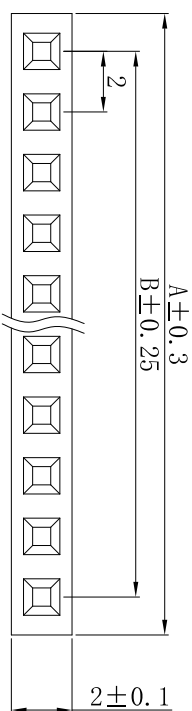

SPECIFICATIONS

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 500V AC/minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn over 50 μ" Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T

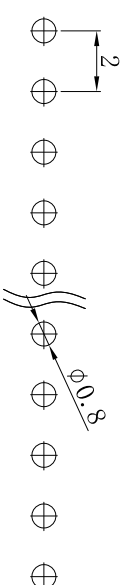

Recommended
P.C.Board Layout

- 备注:
- 1、A= 2.00X No. of Positions + 0.5
 - 2、B= 2.00 X No. of Contacts - 2.00
 - 3、胶壳用常规标准胶壳, 2XNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、端子表层镀金0.8 μ"

Http://www.ciscomn.com				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title		排母2.0mm 单排 卧贴 (塑高6.35) Y型	
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	4:1	V0	XXXX-XXXX-XXX-XX
.XXX ~ ±0.20		Date	Reviewed By	Date	Approval By
Angle ~ ± 3°		Drawing By	LiuYang	2023/05/09	