





REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码

XX-XXX

## SPECIFICATIONS

Current Rating:3A  
 Contact Resistance:30mΩ Max  
 Insulator resistance:1000MΩ Min  
 Dielectric withstandinga:AC 500V  
 Operating Temperature:-40° C~+105° C  
 Contact Material:Brass or Phosphor bronze  
 Insulator Material:Polyester, UL94V-0  
 Standard:P. B. T  
 Finish:Tin, gold Duplex plated  
 Note:  
 Duples plating:gold plated on contact area,  
 Tin on solder area

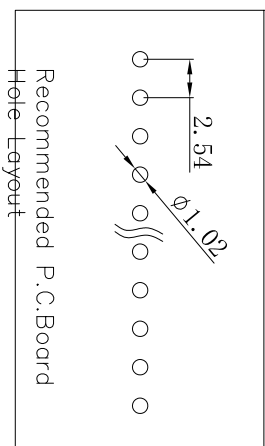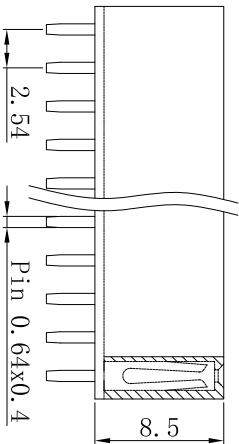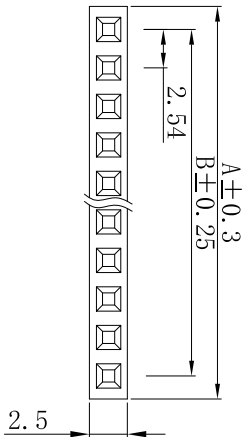

- 备注:
- 1、A= 2.54 X No. of Positions + 0.5
  - 2、B= 2.54 X No. of Contacts - 2.54
  - 3、胶壳用常规标准胶壳, 3xNo. of Contacts
  - 4、材质: PBT 颜色: 黑色
  - 5、端子表层镀金

Http://www.cisconn.com		深圳市新世联电子有限公司	
TEL: +86 (755) 29912370 FAX: 29912372		排母2.54mm 单排 180度 (塑高8.5) Y型	
Tolerance Unless Otherwise Specified	Title	Units	Scale
.X ~ ±0.30		mm	2:1
.XX ~ ±0.25			
.XXX ~ ±0.20	Drawing By	Date	Reviewed By
Angle ~ ± 3°	LiuYang	2023/05/11	
	REV NO.	Material No.	
	V0	XXXX-XXXX-XXX-XX	
	Date	Approval By	Date