

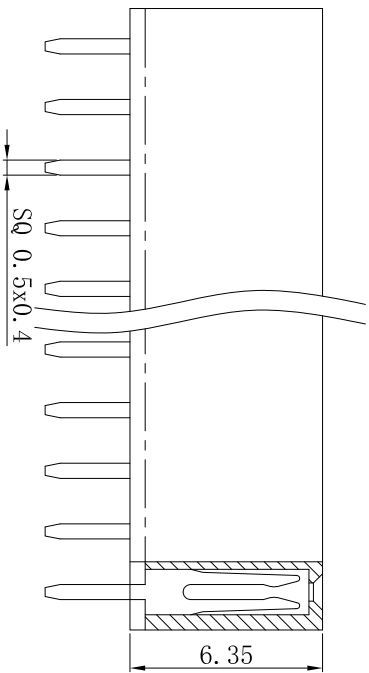


| | | | |
|----------|---------------|---------|------------|
| REV. NO. | REVISION NOTE | REVISER | DATE |
| V0 | NEW DRAWING | | 2023/05/24 |


客户编码

XXX-XXX

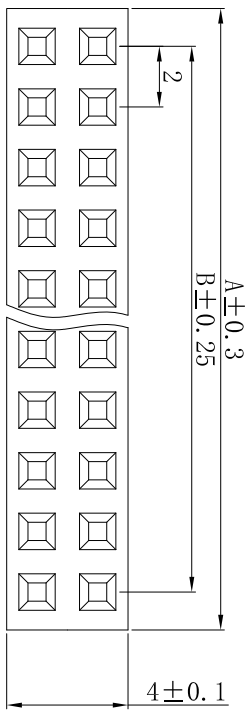

SPECIFICATIONS

- Current Rating:2.0AMP
- Contact Resistance:20mΩ Max
- Insulation Resistance:1000MΩ Min
- Withstand Voltage:500V AC/minute
- Operation Temperature:-40℃ to +105℃
- Contact Material: Brass
- Contact Plating: Au or Sn over 50 μ Ni
- Insulator Material: Polyester(UL94V-0)
- Standard: PA6T

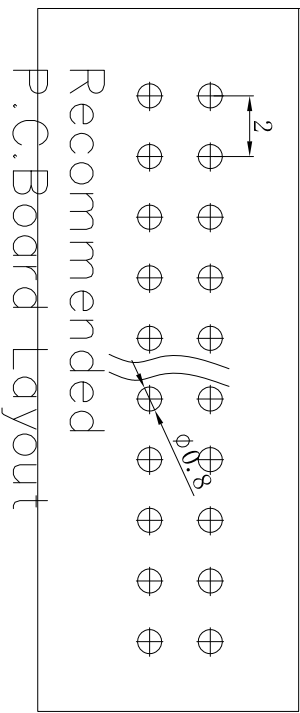

- 备注:
- 1、A= 2.00X No. of Positions + 0.5
 - 2、B= 2.00 X No. of Contacts - 2.00
 - 3、胶壳用常规标准胶壳, 2XNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、端子表层镀金0.8 μ ”

| | | | | | |
|---|--|---------|-------------|---|-----------------|
| Http://www.ciscomn.com | | | | 深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372 | |
| Tolerance Unless Otherwise Specified | | Title | | 排母2.0mm 双排 180度 (塑高6.35) Y型 | |
| .X ~ ±0.30 | | Units | Scale | REV NO. | Material No. |
| .XX ~ ±0.25 | | mm | 4:1 | V0 | XXXX-XXXX-XX-XX |
| .XXX ~ ±0.20 | | Date | Reviewed By | Date | Approval By |
| Angle ~ ± 3° | | LiuYang | 2023/05/24 | | |