

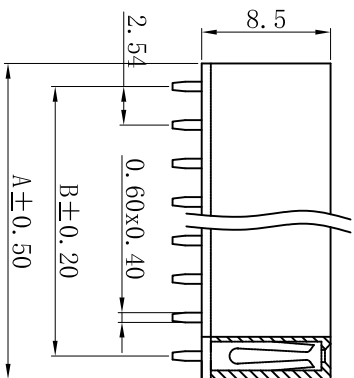


REV. NO.	REVISION NOTE	REVISED	DATE
V0	NEW DRAWING		2023/05/11


客户编码

XX-XXX

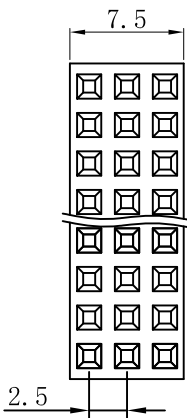

SPECIFICATIONS

- Current Rating:3A
- Contact Resistance:30mΩ Max
- Insulator Resistance:1000MΩ Min
- Dielectric withstanding:AC 500V
- Operating Temperature:-40°C~ +105°C
- Contact Material:Brass or Phosphor bronze
- Insulator Material:Polyester,UL94V-0
- Standard:PA6T

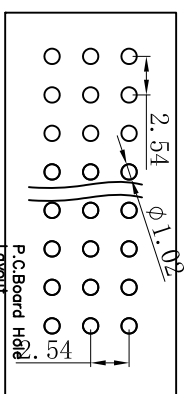

- 备注:
- 1、A= 2.54 X No. of Positions + 0.5
 - 2、B= 2.54 X No. of Contacts - 2.54
 - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、端子表层镀金0.8 μ"

Http://www.ciscomn.com				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title		排母2.54mm 三排 180度 (塑高8.5) Y型	
.X ~ ±0.30			Units	Scale	REV NO.
.XX ~ ±0.25			mm	1:1	V0
.XXX ~ ±0.20			Date	Reviewed By	Date
Angle ~ ± 3°			LiuYang	2023/05/11	
				Material No.	Approval By
				XXXXX-XXXXX-XXX-XX	Date