

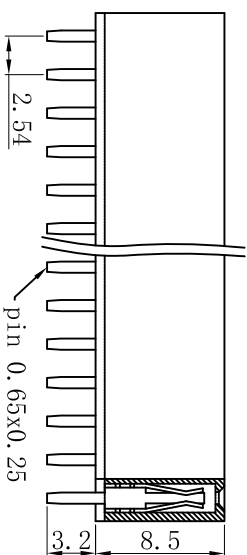


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09

客户编码

XX-XXX

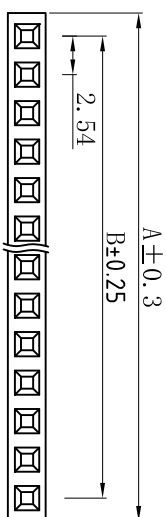


## APPLICATION AND FEATURES

- 1.Side end stackable(on unbrken edges).
- 2.Notches for easy breakable.
- 3.Maintains the dimension between two P.C Board.
- 4.Varizble pin length,gold or tin plated.
- 5.Standffs facilitate pisty solderingt clean.

## SPECIFICATIONS

Current Rating:3A  
 Contact Resistance:30mΩ Max  
 Insulator resistance:1000MΩ Min  
 Dielectric withstanding:AC 500V  
 Operating Temperature:-40°C~ +105°C  
 Contact Material:Brass or Phosphor bronze  
 Insulator Material:Polyester, UL94V-0  
 Standard:PA6T

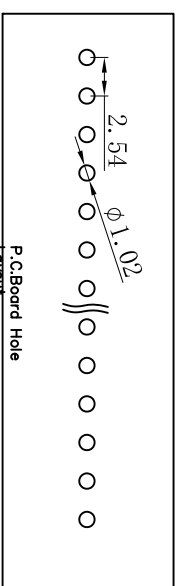P.C Board Hole  
Layout

## 备注:




- 1、A= 2.54 X No. of Positions + 0.5
- 2、B= 2.54 X No. of Contacts - 2.54
- 3、胶壳用常规标准胶壳, 2xNo. of Contacts
- 4、材质: PA6T 颜色: 黑色
- 5、端子表层镀金0.8 μ"

4

3

2

1

		深圳市新世联电子有限公司	
Http://www.ciscomm.com		TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	排母2.54mm 单排 180度 (塑高8.5) U型	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20	Drawing By	Date	Reviewed By
Angle ~ ± 3°	LiuYang	2023/05/09	
	REV NO.	Material No.	
	V0	XXXX-XXXX-XX-XX	
	Date	Approval By	Date