
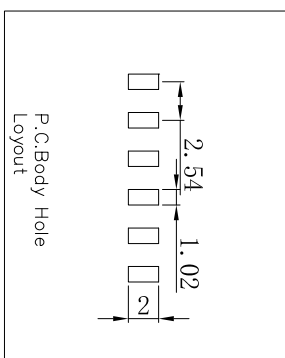

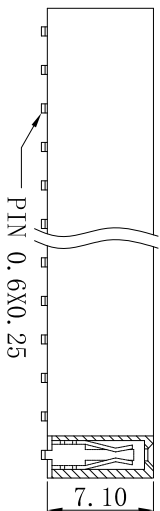


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码

XX-XXX

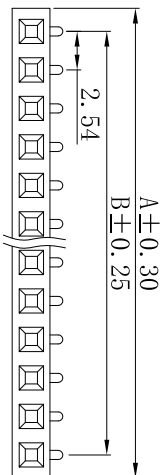

## APPLICATION AND FEATURES

- 1.Side and end stackable(On unbrken edges).
- 2.Notches for easy breakable.
- 3.Maintains the dimension between two P.C Board.
- 4.Vartzble pin length,gold or tin plated.
- 5.Standiffs facilitate plsty solderingt clean.

## SPECIFICATIONS

Current Rating:3A  
 Contact Resistance:30mΩ Max  
 Insulator resistance:1000MΩ Min  
 Dielectric Withstanding:AC 500V  
 Operating Temperature:-40°C~ +105°C  
 Contact Material:Brass or Phosphor bronze  
 Insulator Material:Polyester,UL94V-0  
 Standard:P.B.1

- 备注:
- 1、A= 2.54 X No. of Positions + 0.5
  - 2、B= 2.54 X No. of Contacts - 2.54
  - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
  - 4、材质: PBT 颜色: 黑色
  - 5、端子表层镀金0.8 μ "

Http://www.ciscomn.com		深圳市新世联电子有限公司	
Tolerance Unless Otherwise Specified		TEL: +86 (755) 29912370 FAX: 29912372	
.X ~ ±0.30	Title	Units	排母2.54mm 单排 立贴 (塑高7.1) U型
.XX ~ ±0.25		Scale	2:1
.XXX ~ ±0.20	Drawing By	Date	2023/05/11
Angle ~ ± 3°	LiuYang	Reviewed By	
		Date	
		REV NO.	V0
		Material No.	XXXXX-XXXXX-XXX-XX
		Approval By	
		Date	