
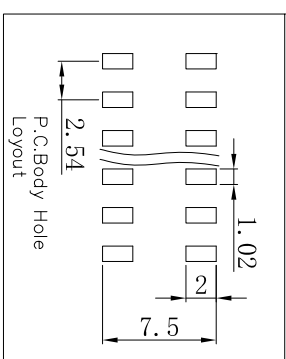

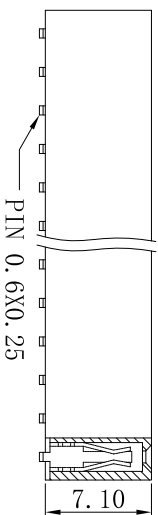


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码

XX-XXX

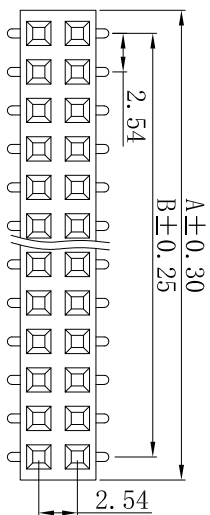

APPLICATION AND FEATURES

- 1.Side and end stackable(On unbrken edges).
- 2.Notches for easy breakable.
- 3.Maintains the dimension between two P.C Board.
- 4.Vartzble pin length,gold or tin plated.
- 5.Standiffs facilitate plsty solderingt clean.

SPECIFICATIONS

Current Rating:3A
 Contact Resistance:30mΩ Max
 Insulator resistance:1000MΩ Min
 Dielectric Withstanding:AC 500V
 Operating Temperature:-40°C~ +105°C
 Contact Material:Brass or Phosphor bronze
 Insulator Material:Polyester,UL94V-0
 Standard:P.B.1

- 备注:
- 1、A= 2.54 X No. of Positions + 0.5
 - 2、B= 2.54 X No. of Contacts - 2.54
 - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
 - 4、材质: PBT 颜色: 黑色
 - 5、端子表层镀金0.8 μ "

Http://www.ciscomn.com		ciscomn	
Tolerance Unless Otherwise Specified	Title	深圳市新世联电子有限公司	
.X ~ ±0.30	Units	排母2.54mm	双排 立贴 (塑高7.1) U型
.XX ~ ±0.25	Scale	2:1	
.XXX ~ ±0.20	REV NO.	V0	XXXX-XXXX-XXX-XX
Angle ~ ± 3°	Reviewed By	Date	Approval By
	LiuYang	2023/05/11	

TEL: +86 (755) 29912370 FAX: 29912372