

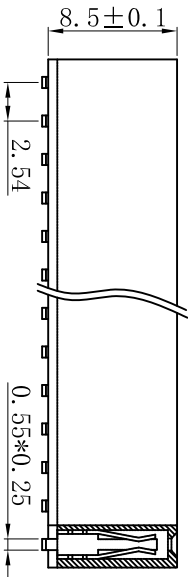


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09


客户编码

XX-XXX

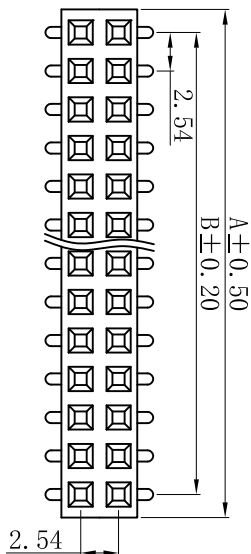

SPECIFICATIONS

Current Rating:3A
 Contact Resistance:30mΩ Max
 Insulator Resistance:1000MΩ Min
 Dielectric withstanding:AC 500V
 Operating Temperature:-40°C~ +105°C
 Contact Material:Brass or Phosphor bronze
 Insulator Material:Polyester,UL94V-0
 Standard:PA6T

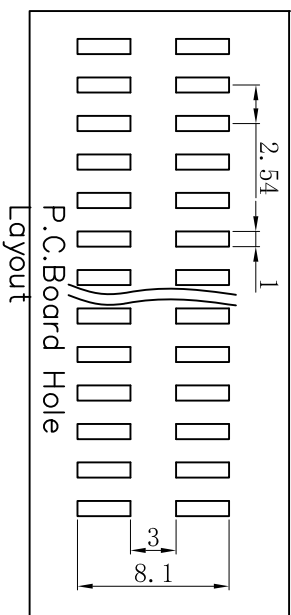

- 备注:
- 1、A= 2.54 X No. of Positions + 0.5
 - 2、B= 2.54 X No. of Contacts - 2.54
 - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、端子表层镀金0.8 μ"

Http://www.ciscomn.com 		深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372	
Tolerance Unless Otherwise Specified	Title	排母2.54mm 双排 立贴 (塑高8.5) U型	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20	Drawing By	Date	Reviewed By
Angle ~ ± 3°	LiuYang	2023/05/09	
		REV NO.	Material No.
		V0	XXXX-XXXX-XXX-XX
		Date	Approval By
			Date