

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码

XX-XXX




Electrical Data:

Current rating: 1Amps
 Dielectric Withstanding Voltage: 500VAC
 for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

Standard: Nylon-6T

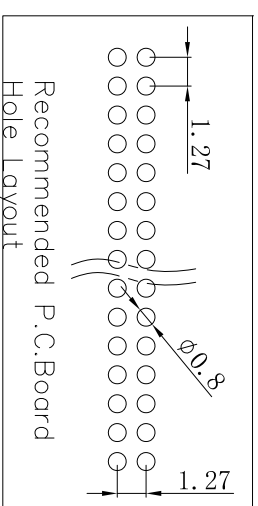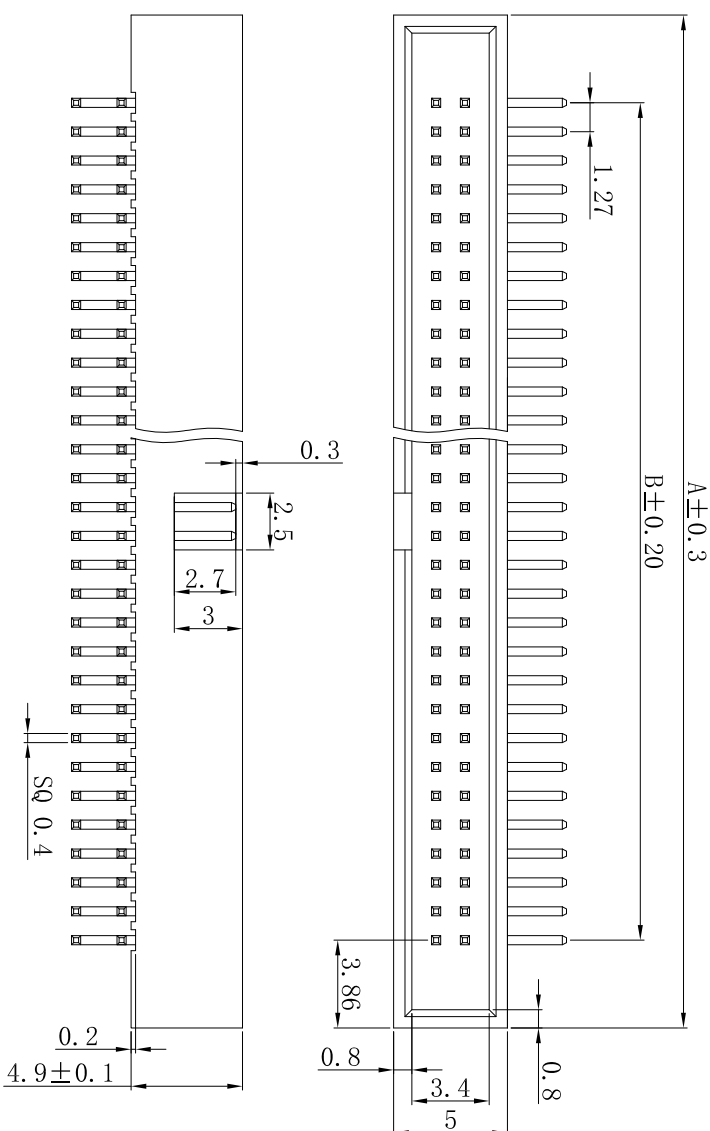

备注:

- 1、A= 1.27 X No. of Positions+6.4
- 2、B= 1.27 X No. of Contacts - 1.27
- 3、胶壳用常规标准胶壳, 2xNo. of Contacts
- 4、材质: PA6T 颜色: 黑色
- 5、表层镀金
- 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

[Http://www.ciscomm.com](http://www.ciscomm.com)

深圳市新世联电子有限公司
 TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless
Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20
Angle ~ ± 3°

Title

筒牛1.27mm 双排 90度 (塑高4.9 塑宽5.0)

Units

mm

Drawing By

Date

LiuYang

2023/05/11

Scale

2:1

Reviewed By

Date

Date

Date

REV NO.

Material No.

V0

XXXX-XXXX-XX-XX

Approval By

Date