

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11




客户编码	XX-XXX
------	--------

Electrical Data:

Current rating: 1Amps
 Dielectric Withstanding Voltage: 500VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C


Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Plating: gold
 Standard: Nylon-6T

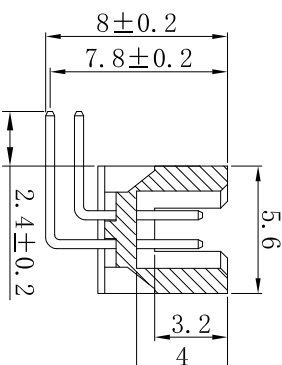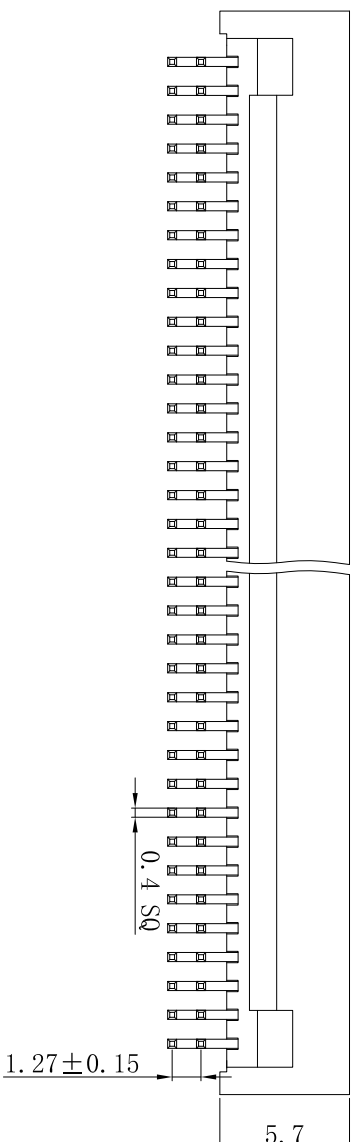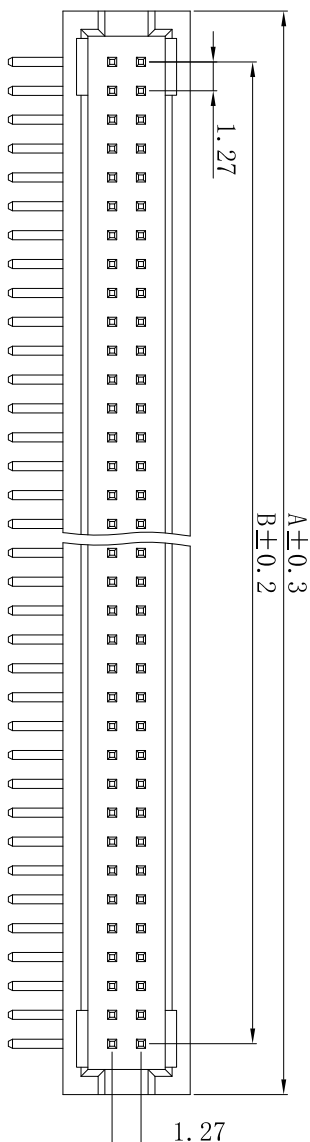

备注:

- 1、A= 1.27 X No. of Positions+6.4
- 2、B= 1.27 X No. of Contacts - 1.27
- 3、胶壳用常规标准胶壳, 2XNo. of Contacts
- 4、材质: PA6T 颜色: 黑色
- 5、表层镀金
- 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

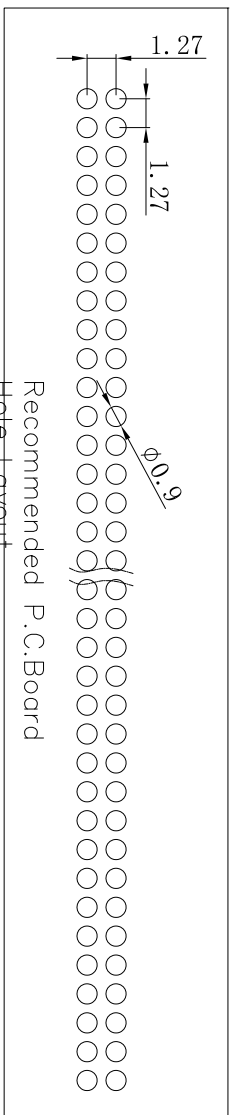

深圳市新世联电子有限公司
 TEL: +86 (755) 29912370 FAX: 29912372

Http://www.ciscom.com

Tolerance Unless Otherwise Specified	Title		筒牛1.27mm 双排 90度 (塑高5.7 塑宽5.6)	
.X ~ ±0.30		Units	Scale	REV NO.
.XX ~ ±0.25		mm	2:1	V0
.XXX ~ ±0.20		Date	Reviewed By	Date
Angle ~ ± 3°		LiuYang	2023/05/11	Approval By
				Date