

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码

XX-XXX





## Electrical Data:

Current rating: 1Amps  
 Dielectric Withstanding Voltage: 500VAC  
 for one minute  
 Contact Resistance: < 20 mΩ  
 Insulation Resistance: > 1000 MΩ  
 Operating Temperature: -40°C ~ +105°C

## Construction:

Insulator: Black Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of copper alloy  
 Contacts plating: Selective gold on surface contact area

Standard: Nylon-6T

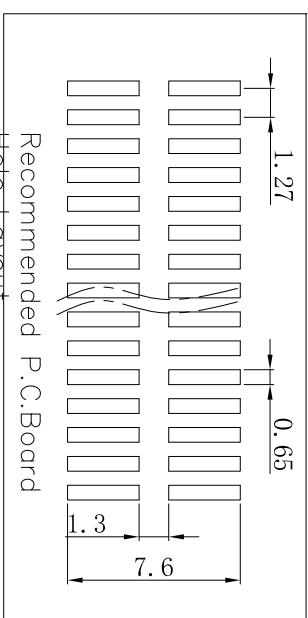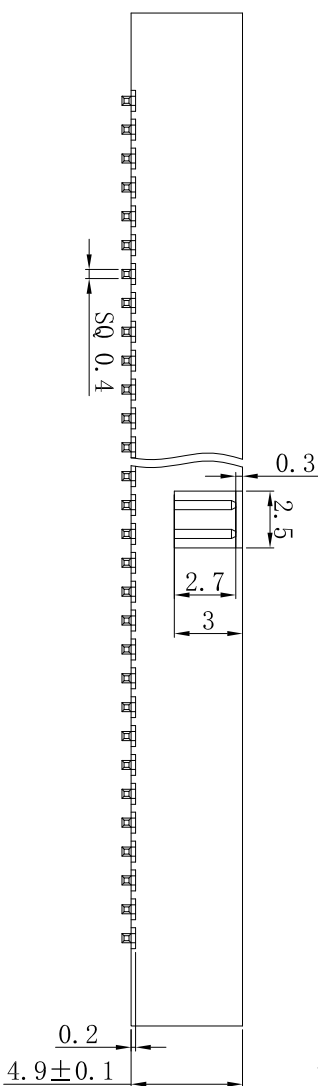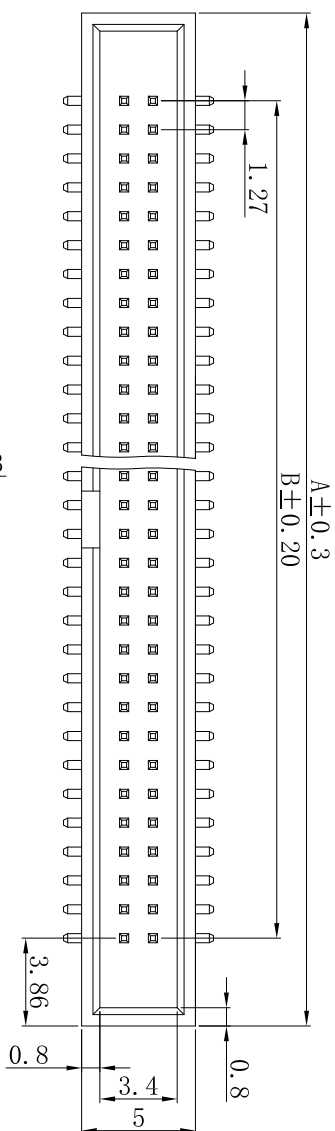

- 备注:
- 1、A= 1.27 X No. of Positions+6.4
  - 2、B= 1.27 X No. of Contacts - 1.27
  - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
  - 4、材质: PA6T 颜色: 黑色
  - 5、表层镀金
  - 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

<http://www.ciscom.com>

深圳市新世联电子有限公司  
 TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless  
Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

Title

筒牛1.27mm 双排 卧贴 (塑高4.9 塑宽5.0)

Units

mm

Scale

2:1

REV NO.

Material No.

Drawing By

Date

Reviewed By

Date

Approval By

Date

LiuYang

2023/05/11