

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11





客户编码

XX-XXX

Electrical Data:
 Current rating: 1Amps
 Dielectric Withstanding Voltage: 500VAC
 for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:
 Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

Standard: Nylon-6T

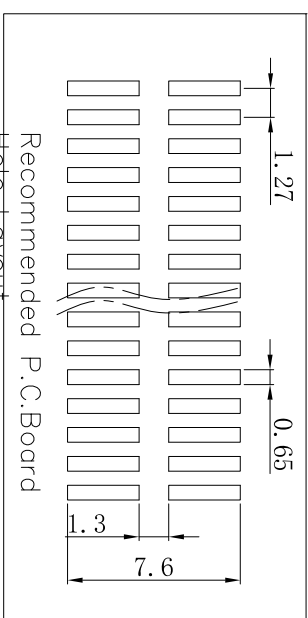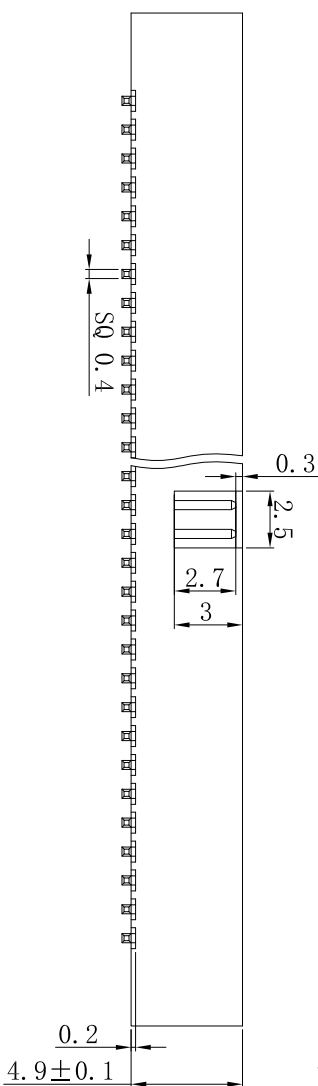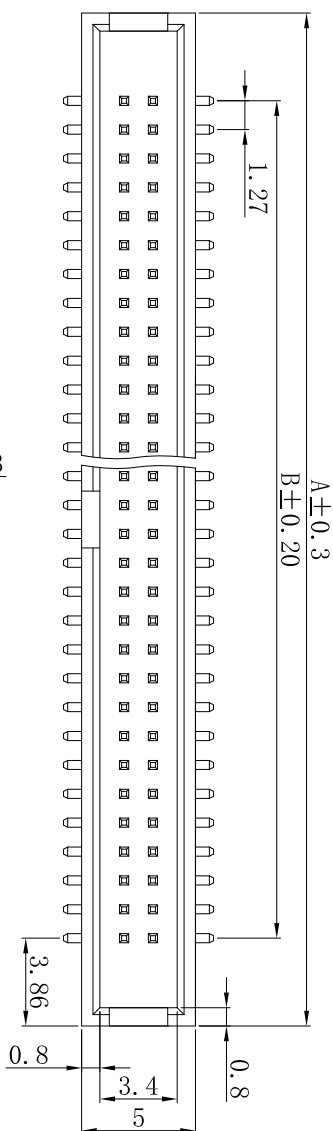

- 备注:
- 1、A= 1.27 X No. of Positions+6.4
 - 2、B= 1.27 X No. of Contacts - 1.27
 - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、表层镀金
 - 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

Http://www.ciscomn.com 		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless otherwise Specified	Title	筒牛1.27mm 双排 卧贴 (塑高4.9 塑宽5.0) 两端开槽	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20	Drawing By	Date	REV NO.
Angle ~ ± 3°	LiuYang	2023/05/11	V0
	Reviewed By	Date	Material No.
			XXXX-XXXX-XXX-XX
			Approval By
			Date