
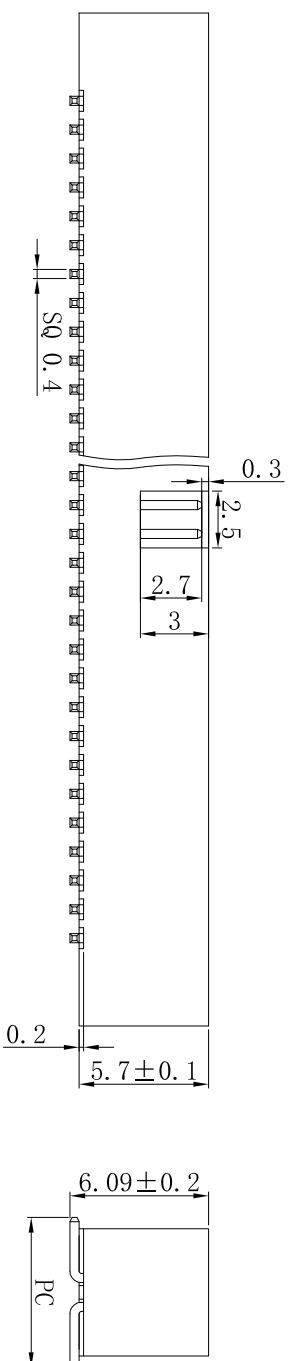


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码


XX-XXX

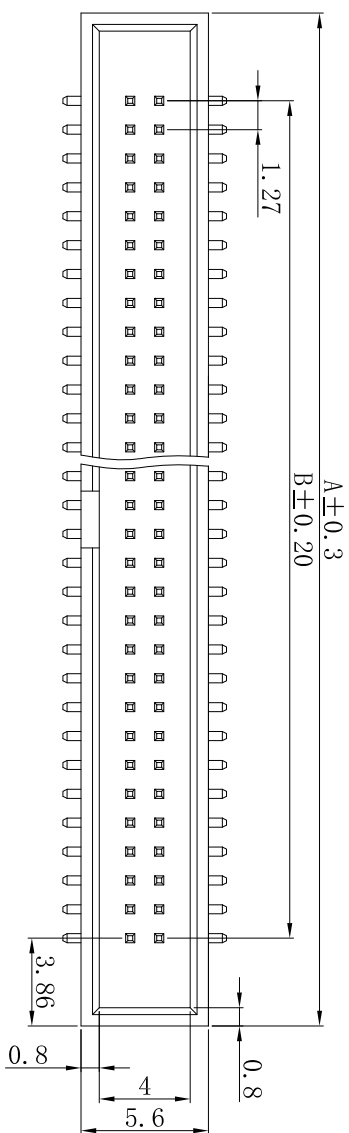

**Electrical Data:**  
 Current rating: 1Amps  
 Dielectric Withstanding Voltage: 500VAC  
 for one minute  
 Contact Resistance: < 20 mΩ  
 Insulation Resistance: > 1000 MΩ  
 Operating Temperature: -40°C ~ +105°C

**Construction:**  
 Insulator: Black Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of copper alloy  
 Contacts plating: Selective gold on surface contact area

Standard: Nylon-6T

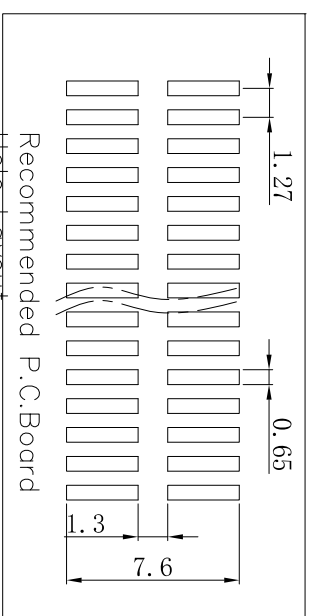

- 备注:
- 1、A= 1.27 X No. of Positions+6.4
  - 2、B= 1.27 X No. of Contacts - 1.27
  - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
  - 4、材质: PA6T 颜色: 黑色
  - 5、表层镀金
  - 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

<a href="http://www.ciscomn.com">Http://www.ciscomn.com</a> 		深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372	
Tolerance Unless Otherwise Specified	Title	筒牛1.27mm 双排 立贴 (塑高5.7 塑宽5.6)	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20		Date	REV NO.
Angle ~ ± 3°		2023/05/11	V0
		Drawing By	Material No.
		LiuYang	XXXXX-XXXXX-XXX-XX
			Reviewed By
			Date
			Approval By
			Date