
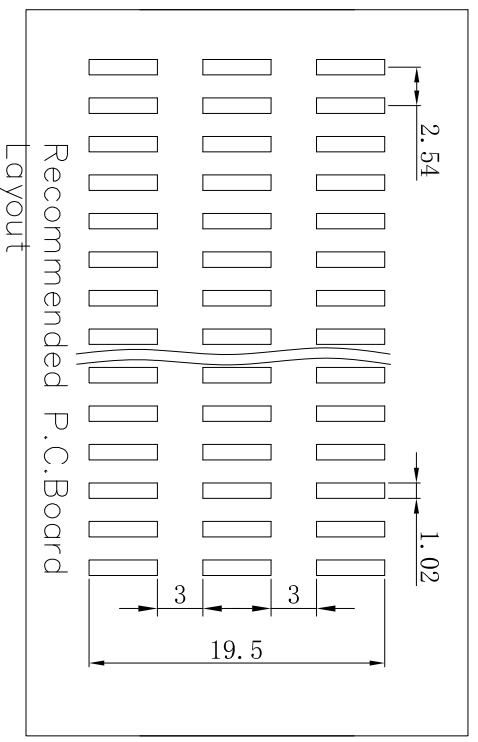

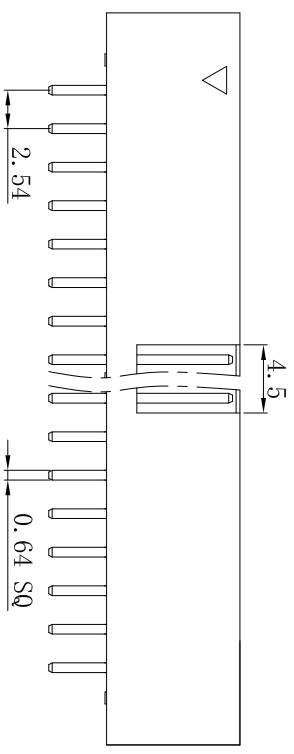


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/12

客户编码	XX-XXX
------	--------

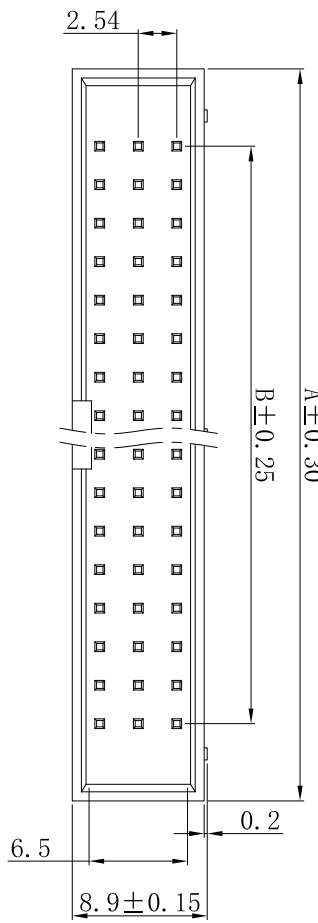

Electrical Data:
 Current rating: 3Amps
 Dielectric Withstanding Voltage: 500VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:
 Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

Pin	Dimensions		Pin	Dimensions	
	A	B		A	B
2x21P	60.96	50.80	2x21P	60.96	50.80
2x22P	63.50	53.34	2x22P	63.50	53.34
2x23P	66.04	55.88	2x23P	66.04	55.88
2x24P	68.58	58.42	2x24P	68.58	58.42
2x25P	71.12	60.96	2x25P	71.12	60.96
2x26P	73.66	63.50	2x26P	73.66	63.50
2x27P	76.20	66.04	2x27P	76.20	66.04
2x28P	78.74	68.58	2x28P	78.74	68.58
2x29P	81.28	71.12	2x29P	81.28	71.12
2x30P	83.82	73.66	2x30P	83.82	73.66
2x31P	86.36	76.20	2x31P	86.36	76.20
2x32P	88.90	78.74	2x32P	88.90	78.74
2x33P	91.44	81.28	2x33P	91.44	81.28
2x34P	93.98	83.82	2x34P	93.98	83.82
2x35P	96.52	86.36	2x35P	96.52	86.36
2x36P	99.06	88.90	2x36P	99.06	88.90
2x37P	101.6	91.44	2x37P	101.6	91.44
2x38P	104.14	93.98	2x38P	104.14	93.98
2x39P	106.68	96.52	2x39P	106.68	96.52
2x40P	109.22	99.06	2x40P	109.22	99.06



深圳市新世联电子有限公司
 TEL: +86 (755) 29912370 FAX: 29912372

Http://www.ciscomm.com		Title		筒牛2.54mm 三排 180度 (塑高8.9)	
Tolerance Unless Otherwise Specified		Units		Scale	
.X ~ ±0.30	mm	1:1		REV NO.	
.XX ~ ±0.25		Date		V0	
.XXX ~ ±0.20		Drawing By		XXXXX-XXXXX-XXX-XX	
Angle ~ ± 3°		Date		Approval By	
		LiuYang		Date	
		2023/05/12			