

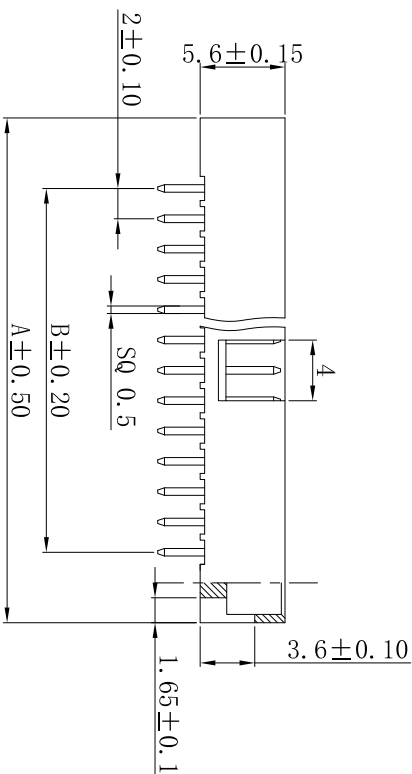


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/12


客户编码	XX-XXX
------	--------



Electrical Data:
 Current rating: 2Amps
 Dielectric Withstanding Voltage: 500VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:
 Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy

Contacts Plating: Surface of Pins Standard: PA63	Dimensions of Pin A	Selective gold on Dimensions B
2x2P	11.3	2x21P 49.3
2x3P	13.3	2x22P 51.3
2x4P	15.3	2x23P 53.3
2x5P	17.3	2x24P 55.3
2x6P	19.3	2x25P 57.3
2x7P	21.3	2x26P 59.3
2x8P	23.3	2x27P 61.3
2x9P	25.3	2x28P 63.3
2x10P	27.3	2x29P 65.3
2x11P	29.3	2x30P 67.3
2x12P	31.3	2x31P 69.3
2x13P	33.3	2x32P 71.3
2x14P	35.3	2x33P 73.3
2x15P	37.3	2x34P 75.3
2x16P	39.3	2x35P 77.3
2x17P	41.3	2x36P 79.3
2x18P	43.3	2x37P 81.3
2x19P	45.3	2x38P 83.3
2x20P	47.3	2x39P 85.3
		2x40P 87.3

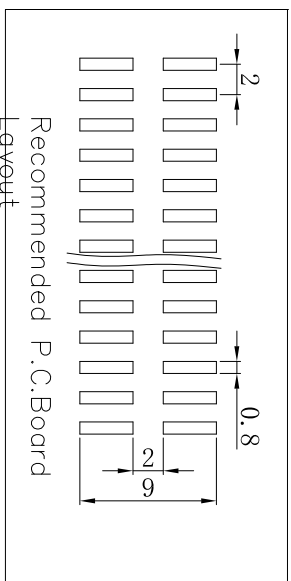

Http://www.ciscomn.com 		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	筒牛2.0mm 双排 180度 (塑高5.6)	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20	Drawing By	Date	REV NO.
Angle ~ ± 3°	LiuYang	2023/05/12	V0
	Reviewed By	Date	Material No.
			XXXXX-XXXXX-XXX-XX
			Approval By
			Date