
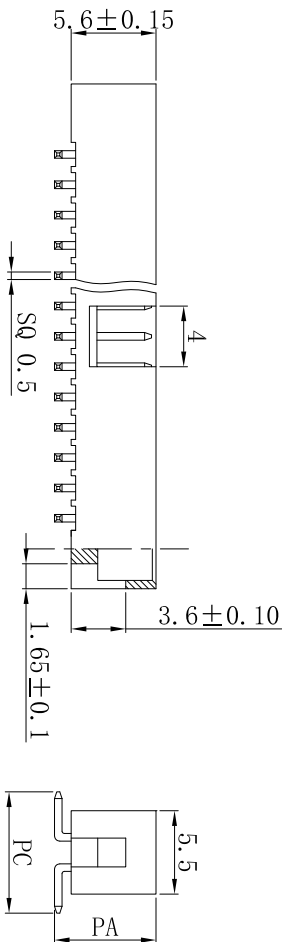


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码

XX-XXX

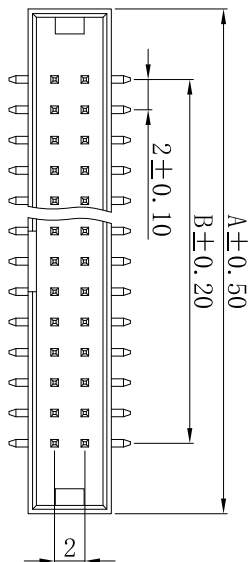

Electrical Data:
 Current rating: 2Amps
 Dielectric Withstanding Voltage: 500VAC
 for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:
 Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area
 Standard: PAGT

Pin	Dimensions		Pin	Dimensions	
	A	B		A	B
2x1P	--	--	2x21P	49.3	40.00
2x2P	11.3	2.00	2x22P	51.3	42.00
2x3P	13.3	4.00	2x23P	53.3	44.00
2x4P	15.3	6.00	2x24P	55.3	46.00
2x5P	17.3	8.00	2x25P	57.3	48.00
2x6P	19.3	10.00	2x26P	59.3	50.00
2x7P	21.3	12.00	2x27P	61.3	52.00
2x8P	23.3	14.00	2x28P	63.3	54.00
2x9P	25.3	16.00	2x29P	65.3	56.00
2x10P	27.3	18.00	2x30P	67.3	58.00
2x11P	29.3	20.00	2x31P	69.3	60.00
2x12P	31.3	22.00	2x32P	71.3	62.00
2x13P	33.3	24.00	2x33P	73.3	64.00
2x14P	35.3	26.00	2x34P	75.3	66.00
2x15P	37.3	28.00	2x35P	77.3	68.00
2x16P	39.3	30.00	2x36P	79.3	70.00
2x17P	41.3	32.00	2x37P	81.3	72.00
2x18P	43.3	34.00	2x38P	83.3	74.00
2x19P	45.3	36.00	2x39P	85.3	76.00
2x20P	47.3	38.00	2x40P	87.3	78.00



深圳市新世联电子有限公司
 TEL: +86 (755) 29912370 FAX: 29912372

Http://www.cisconn.com

Tolerance Unless
 Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°


筒牛2.0mm 双排 卧贴 (塑高5.6) 带翻孔

Units

Scale

REV NO.

Material No.



Drawing By

Date

Reviewed By

Date



2023/05/11

LiuYang

2023/05/11

2023/05/11

2023/05/11

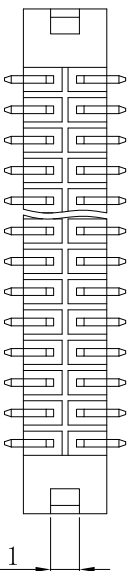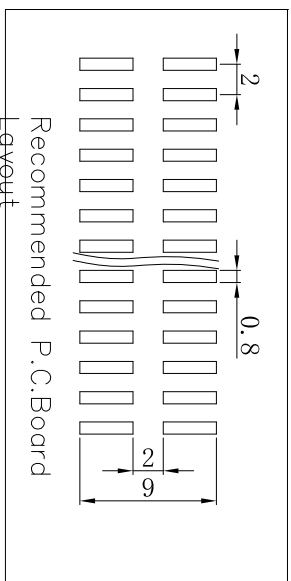

1.9 ± 0.1

