
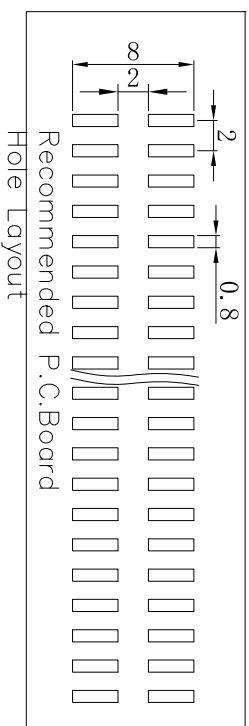

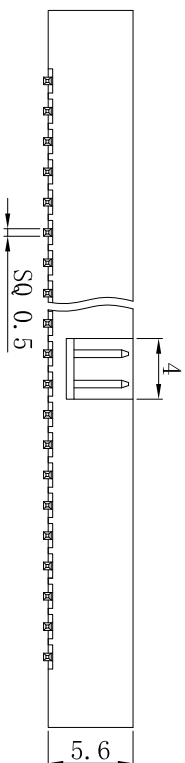


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/11

客户编码

XX-XXX

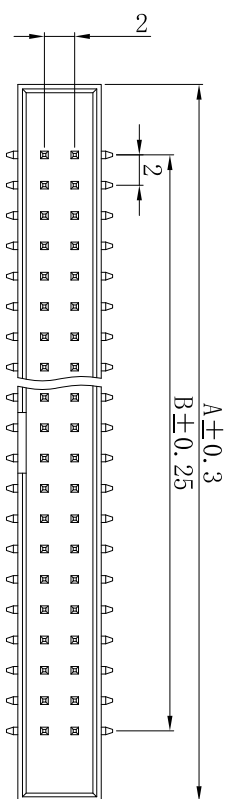

Electrical Data:

Current rating: 2Amps
 Dielectric Withstanding Voltage: 500VAC
 for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on

Standard Pin	Dimensions		Pin	Dimensions	
	A	B		A	B
2x2P	11.3	2.00	2x21P	49.3	40.00
2x3P	13.3	4.00	2x22P	51.3	42.00
2x4P	15.3	6.00	2x23P	53.3	44.00
2x5P	17.3	8.00	2x24P	55.3	46.00
2x6P	19.3	10.00	2x25P	57.3	48.00
2x7P	21.3	12.00	2x26P	59.3	50.00
2x8P	23.3	14.00	2x27P	61.3	52.00
2x9P	25.3	16.00	2x28P	63.3	54.00
2x10P	27.3	18.00	2x29P	65.3	56.00
2x11P	29.3	20.00	2x30P	67.3	58.00
2x12P	31.3	22.00	2x31P	69.3	60.00
2x13P	33.3	24.00	2x32P	71.3	62.00
2x14P	35.3	26.00	2x33P	73.3	64.00
2x15P	37.3	28.00	2x34P	75.3	66.00
2x16P	39.3	30.00	2x35P	77.3	68.00
2x17P	41.3	32.00	2x36P	79.3	70.00
2x18P	43.3	34.00	2x37P	81.3	72.00
2x19P	45.3	36.00	2x38P	83.3	74.00
2x20P	47.3	38.00	2x39P	85.3	76.00
			2x40P	87.3	78.00

[Http://www.cisconn.com](http://www.cisconn.com)

cisconn

深圳市新世联电子有限公司
 TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless
 Otherwise Specified

Title

筒牛2.0mm 双排 立贴 (塑高5.6) 短款

.X ~ ±0.30

Units

mm

Scale

2:1

REV NO.

Material No.

.XX ~ ±0.25

Drawing By

Date

Reviewed By

Date

Approval By

.XXX ~ ±0.20

Angle

± 3°

2023/05/11

LiuYang

2023/05/11