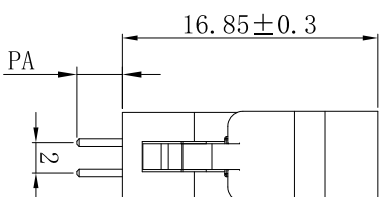
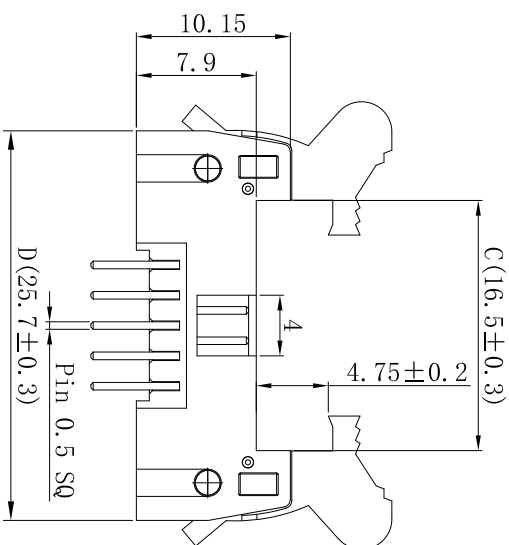
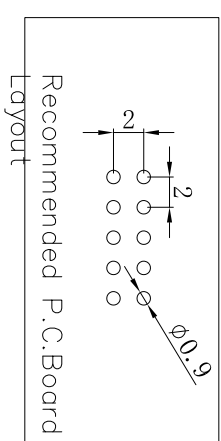
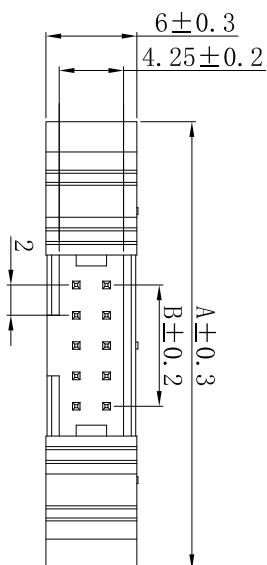


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/12

客户编码

XX-XXX

**Electrical Data:**

Current rating: 2Amps
 Dielectric Withstanding Voltage: 500VAC
 for one minute
 Contact Resistance: < 30 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

Standard: Nylon-6T

备注:

- 1、A= 2.00 X No. of Positions + 19.54
- 2、B= 2.00 X No. of Contacts - 2.00
- 3、C= 2.00 X No. of Contacts + 6.5
- 4、D= 2.00 X No. of Contacts + 15.7
- 5、胶壳用常规标准胶壳, 2xNo. of Contacts
- 6、材质: PA6T 颜色: 黑色
- 7、方针表层镀金
- 8、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

Http://www.ciscom.com		深圳市新世联电子有限公司	
Tolerance Unless Otherwise Specified		TEL: +86 (755) 29912370 FAX: 29912372	
.X ~ ±0.30	Title	Units	牛角2.0mm 双排 180度 矮耳
.XX ~ ±0.25		Scale	2:1
.XXX ~ ±0.20	Drawing By	Date	Reviewed By
Angle ~ ± 3°	LiuYang	2023/05/12	Date
		REV NO.	Material No.
		V0	XXXX-XXXX-XXX-XX
		Date	Approval By
			Date