保存日期:2013/11/22 9:54:23　　编制日期:2023/02/15

REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码	XX-XXX

打印日期:2023/5/26 16:07:57

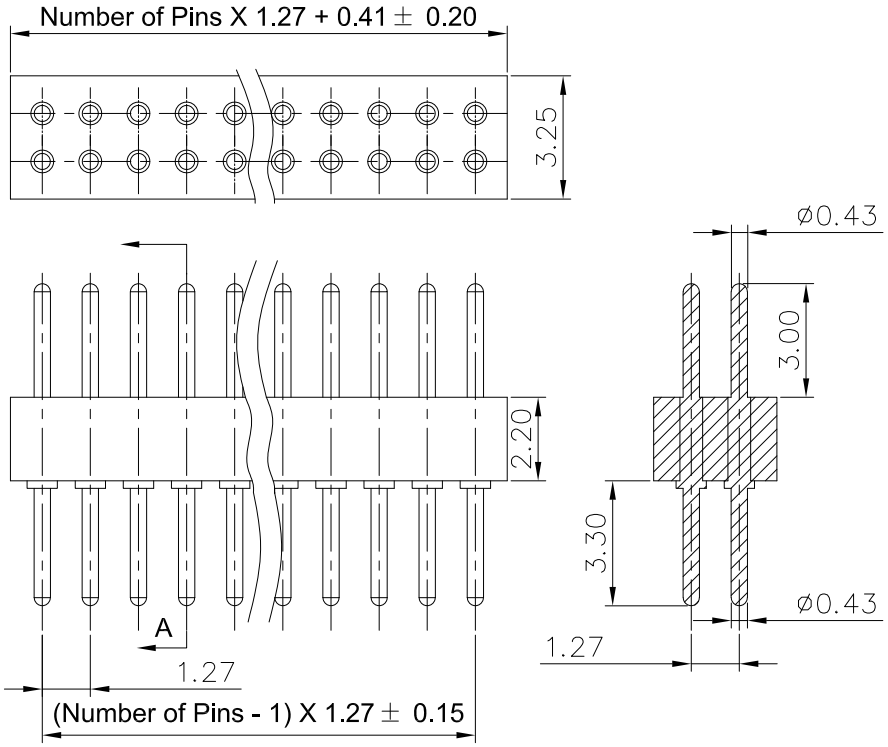

Technical Data

Material:
Pin(outer sleeve): Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn
Gold Plated:2μm/80μ"Ni,0.8 μ " gold
Plating(contact): 2μm/80μ"Ni, gold or Tin plated
Insulator(black): PPS (UL94V-0)

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operaing voltage: 60VAC/DC

Mechanical:
Mechanical life cycle:min.200
Operaing temperatures: Gold Plated:-55°C to+105°C
Tin plated:-40°C to+105°C
Soldering temperature: +260°C,10s max

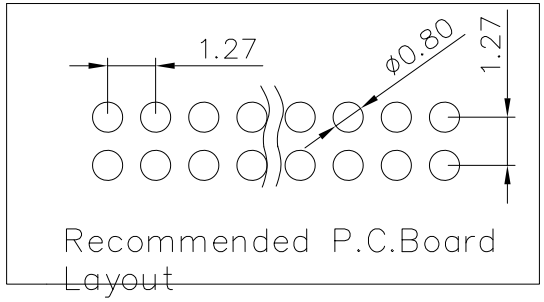

cisconn
Http://www.cisconn.com
深圳市新世联电子有限公司
TEL:+86(755)29912370　FAX:29912372

Tolerance Unless Otherwise Specified	Title	圆孔排针1.27mm 双排 180度（塑高2.2 塑宽3.25）			
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	1:1	V0	XXXXX-XXXXXX-XXX-XX
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approvai By　Date
Angle ~ ± 3°	LiuYang	2023/02/15			