
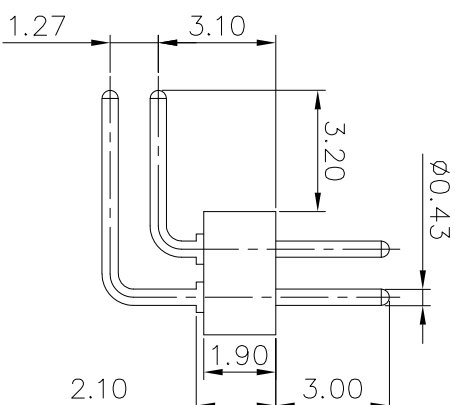
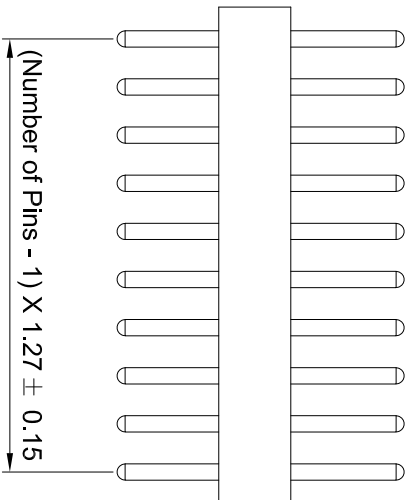


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码

XX-XXX

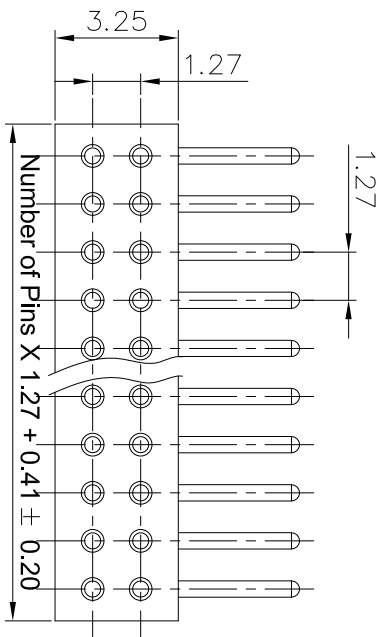

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated:2μm/80μ"Ni,0.8 μ " gold

Plating(contact): 2μm/80μ"Ni, gold or Tin plated

Insulator(black): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 4m\Omega$ /contact

Insulation resistance: $\geq 1000M\Omega$ at V=100V

Operating voltage: 60VAC/DC


Mechanical:



Mechanical life cycle:min.200

Operating temperatures: Gold Plated:-55°C to+105°C

Tin plated:-40°C to+105°C

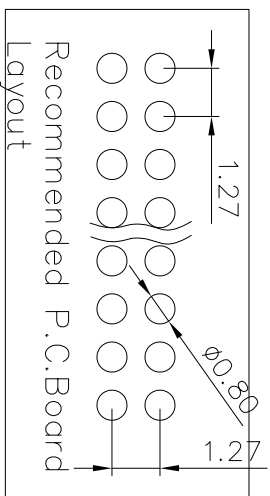Soldering temperature: +260°C,10s max



		深圳市新世联电子有限公司	
Http://www.ciscomm.com		TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified			
.X ~ ±0.30	Title	圆孔排针1.27mm 双排 90度 (塑高1.9 塑宽3.25)	
.XX ~ ±0.25		Units	Scale
.XXX ~ ±0.20	Drawing By	mm	1:1
Angle ~ ± 3°	Date	Reviewed By	REV NO.
	LiuYang 2023/02/15		V0
		Approval By	Material No.
		Date	XXXXX-XXXXX-XXX-XX