
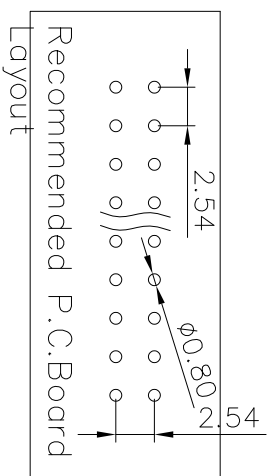

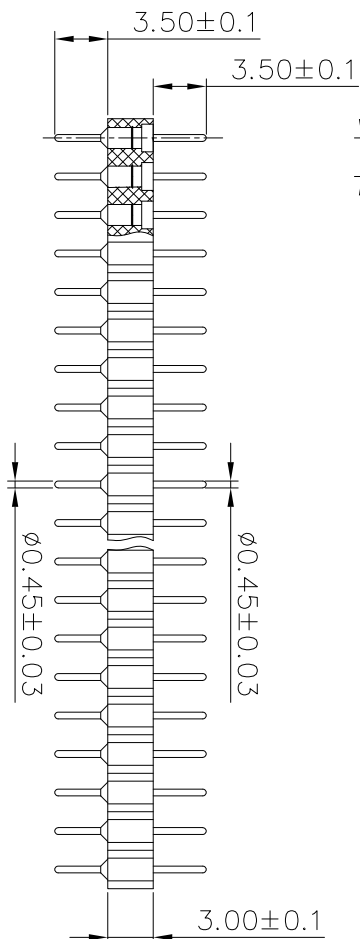


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码

XX-XXX

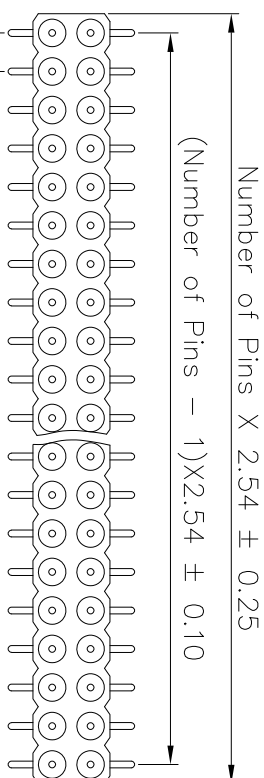

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn
 Gold Plated:2μm/80μ"Ni,0.8 μ " gold
 Plating(contact): 2μm/80μ"Ni, gold or Tin plated
 Insulator(black): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.
 Contact resistance: $\leq 4m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle:min.200
 Operating temperatures: Gold Plated:-55°C to+105°C
 Tin plated:-40°C to+105°C
 Soldering temperature: +260°C,10s max

ciscom
[Http://www.ciscom.com](http://www.ciscom.com)

深圳市新世联电子有限公司
 TEL:+86(755)29912370 FAX:29912372

Tolerance Unless
 Otherwise Specified

Title 圓孔排針2.54mm 双排 立贴 (塑高3.0 塑宽5.08)

.X ~ ±0.30

Units 2.54mm 双排 立贴 (塑高3.0 塑宽5.08)

.XX ~ ±0.25

Scale 1:1 REV NO. V0 Material No. XXXXX-XXXXX-XXX-XX

.XXX ~ ±0.20

Drawing By Date Reviewed By Date Approval By Date

Angle ~ ± 3°

LiuYang 2023/02/15