



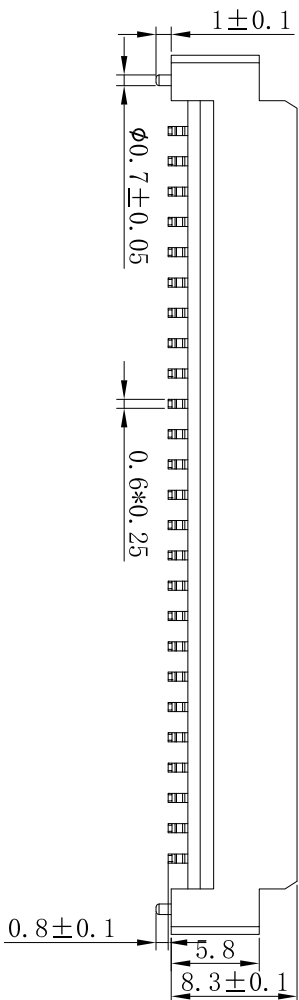


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码



XX-XXX

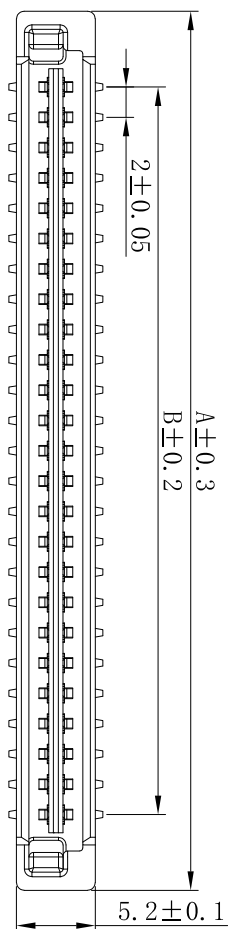

Electrical Data:
 Current rating: 2 Amps
 Dielectric Withstanding Voltage: 500VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area
 Standard: PACT

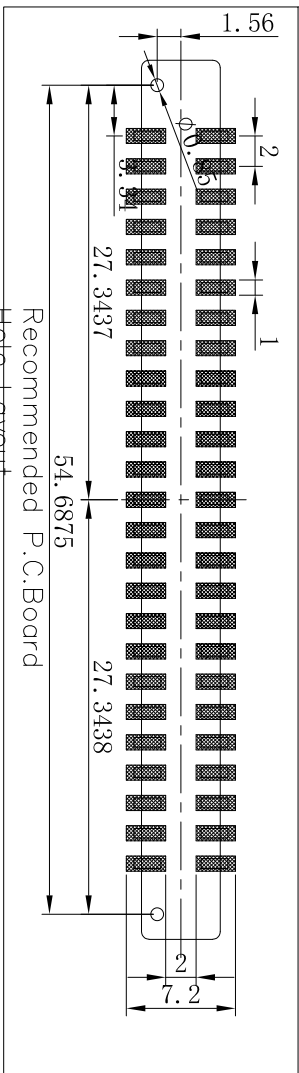

- 备注:
- 1、A= 2.0 X No. of Positions + 8
 - 2、B= 2.0 X No. of Contacts - 2.0
 - 3、胶壳用常规标准胶壳, 2XNo. of Contacts
 - 4、材质: PA6T 颜色: 黑色
 - 5、端子底层镀镍30~60 μm; 表面镀雾锡80 μm “接触区镀金1 μm”
 - 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合



深圳市新世联电子有限公司
 TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless Otherwise Specified		Title	
.X ~ ±0.30	⊙	板对板2.0mm 公端座 立贴	
.XX ~ ±0.25	∅	Units	Scale
.XXX ~ ±0.20	∠	mm	2:1
Angle ~ ± 3°		Date	REV NO.
		2023/02/15	V0
		Reviewed By	Material No.
		LiuYang	XXXXX-XXXXX-XXX-XX
			Approval By
			Date